

- ADPT-MU-CX3-FV • ADPT-MU-CX3-FL
- Adapters with flex line interface for MU

# Introductions

## About this manual

Dear customer,

Thank you for purchasing a product from XIMEA.

We hope that this manual can answer your questions, but should you have any further queries or if you wish to claim a service or warranty case, please contact your local dealer or refer to XIMEA Support on our website: [www.ximea.com/support](http://www.ximea.com/support)

The purpose of this document is to provide a description of XIMEA Accessories and to describe the correct way to install related software, drivers and run it successfully. Please read this manual thoroughly before operating your new XIMEA Accessories for the first time. Please follow all instructions and observe the warnings.

This document is subject to change without notice.

## About XIMEA

XIMEA is one of the worldwide leaders for innovative camera solutions with a 30-year history of research, development and production of digital image acquisition systems. Based in Slovakia, Germany and the US, with a global distributor network, XIMEA offers their cameras worldwide. In close collaboration with customers XIMEA has developed a broad spectrum of technologies and cutting-edge, highly competitive products.

XIMEA's camera centric technology portfolio comprises a broad spectrum of digital technologies, from data interfaces such as USB 2.0, USB 3.1 and PCIe to cooled digital cameras with CCD, CMOS and sCMOS sensors, as well as X-ray cameras.

XIMEA has three divisions – generic machine vision and integrated vision systems, scientific imaging and OEM/custom.

Our broad portfolio of cameras includes thermally stabilized astronomy and x-ray cameras, as well as specialty cameras for medical applications, research, surveillance and defense.

## Contact XIMEA

XIMEA is a worldwide operating company

Headquarters, Sales worldwide

XIMEA GmbH  
Am Mittelhafen 16  
48155 Münster  
Germany

Tel: +49 (251) 202 408-0  
Fax: +49 (251) 202 408-99

Web [www.ximea.com](http://www.ximea.com)  
General inquiries [info@ximea.com](mailto:info@ximea.com)  
Sales [sales@ximea.com](mailto:sales@ximea.com)  
Support [XIMEA Support](#)

Sales America

XIMEA Corp.  
12600 W Colfax Ave., Suite A-130  
Lakewood, CO 80215  
USA

Tel: +1 (303) 389-9838  
Fax: +1 (303) 202-6350

R&D, Production

XIMEA s.r.o.  
Lesná 52  
900 33 Marianka  
Slovakia

Tel: +421 (2) 205 104 26  
Fax: +421 (2) 205 104 27

# Contents

About this manual .....	2
About XIMEA .....	2
Contact XIMEA .....	2
<b>1 General description .....</b>	<b>4</b>
<b>2 Dimensional drawings .....</b>	<b>5</b>
<b>3 Connectors .....</b>	<b>9</b>
3.1 Location of connectors .....	9
3.2 Data interfaces .....	10
3.2.1 Flex cable interface .....	10
3.2.2 GPIO.....	11
<b>4 Quickstart guide .....</b>	<b>12</b>
4.1 Hardware setup .....	12
4.1.1 Essential components.....	12
4.1.2 Connecting the components .....	12
List of figures .....	14
List of tables .....	15

## 1 General description

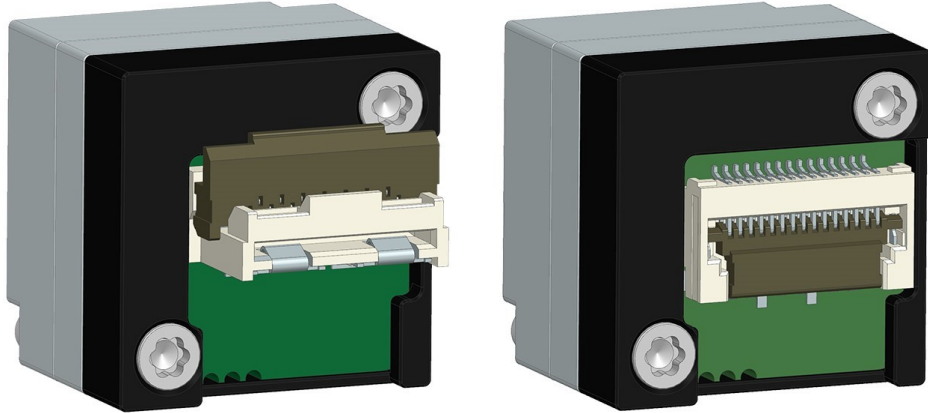


Figure 1: Isometric view of adapters

The adapter is designed to connect small MU cameras  $15 \times 15$  mm or  $17 \times 17$  mm via the ximea proprietary flex line interface. The interface connector is compatible with MQ-S7-FL accessories.

This adapter enables both triggering and output signaling from the camera.  
The adapters is mounted on the camera rear using 2x M1.6x5 countersunk TRX screws.

## 2 Dimensional drawings

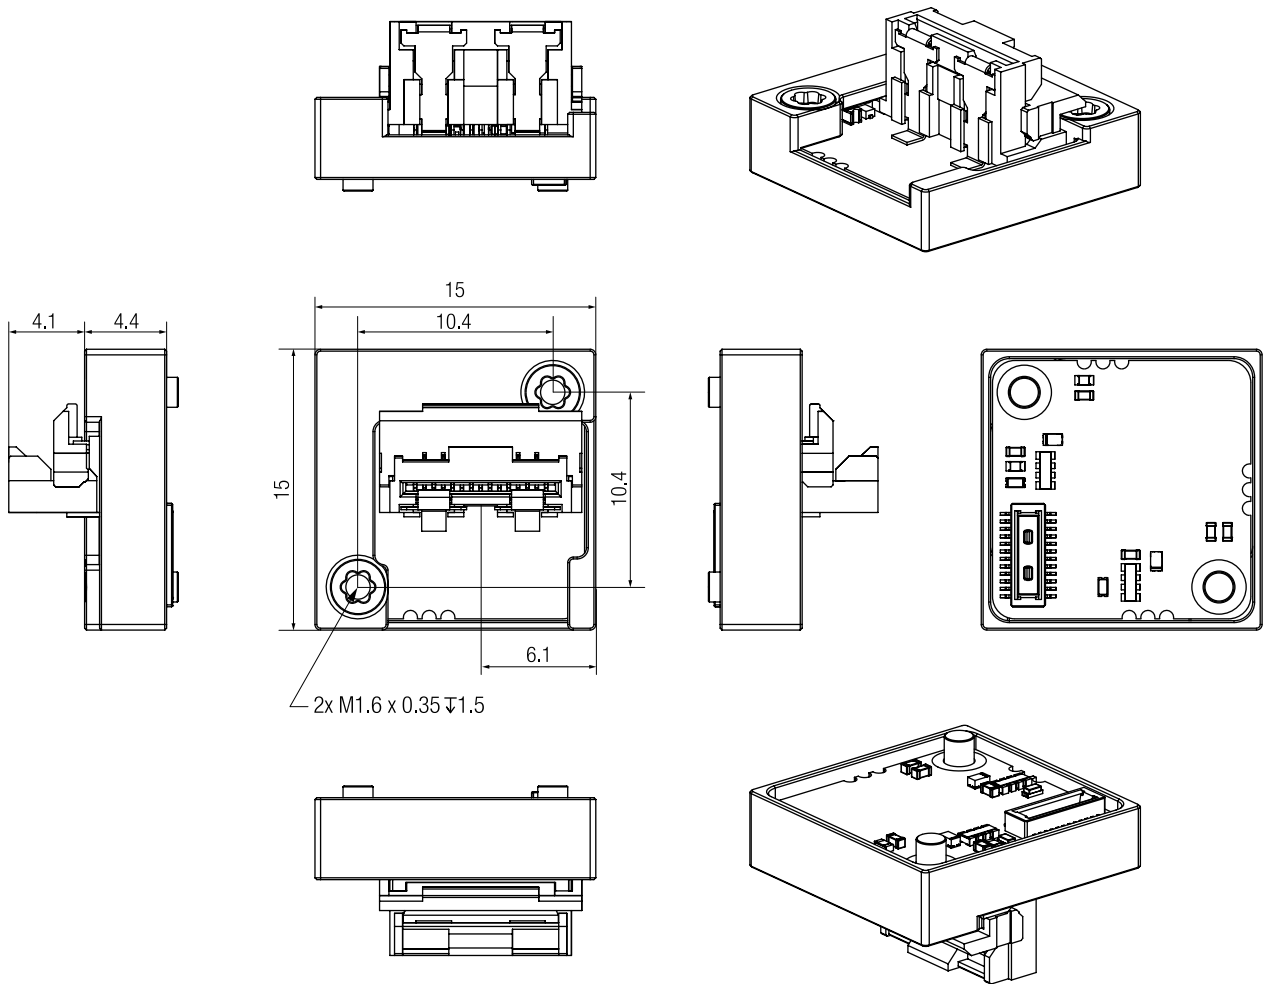


Figure 2: Dimensional drawing of ADPT-MU-CX3-FV

Width [ W ]	Height [ H ]	Depth [ D ]	Mass [ M ]	Material
15 mm	15 mm	4.4 / 8.5 mm	1.8 g	Machined Aluminum alloy <sup>1</sup>

<sup>1</sup>Anodized to black color

Table 1: Parameters of ADPT-MU-CX3-FV

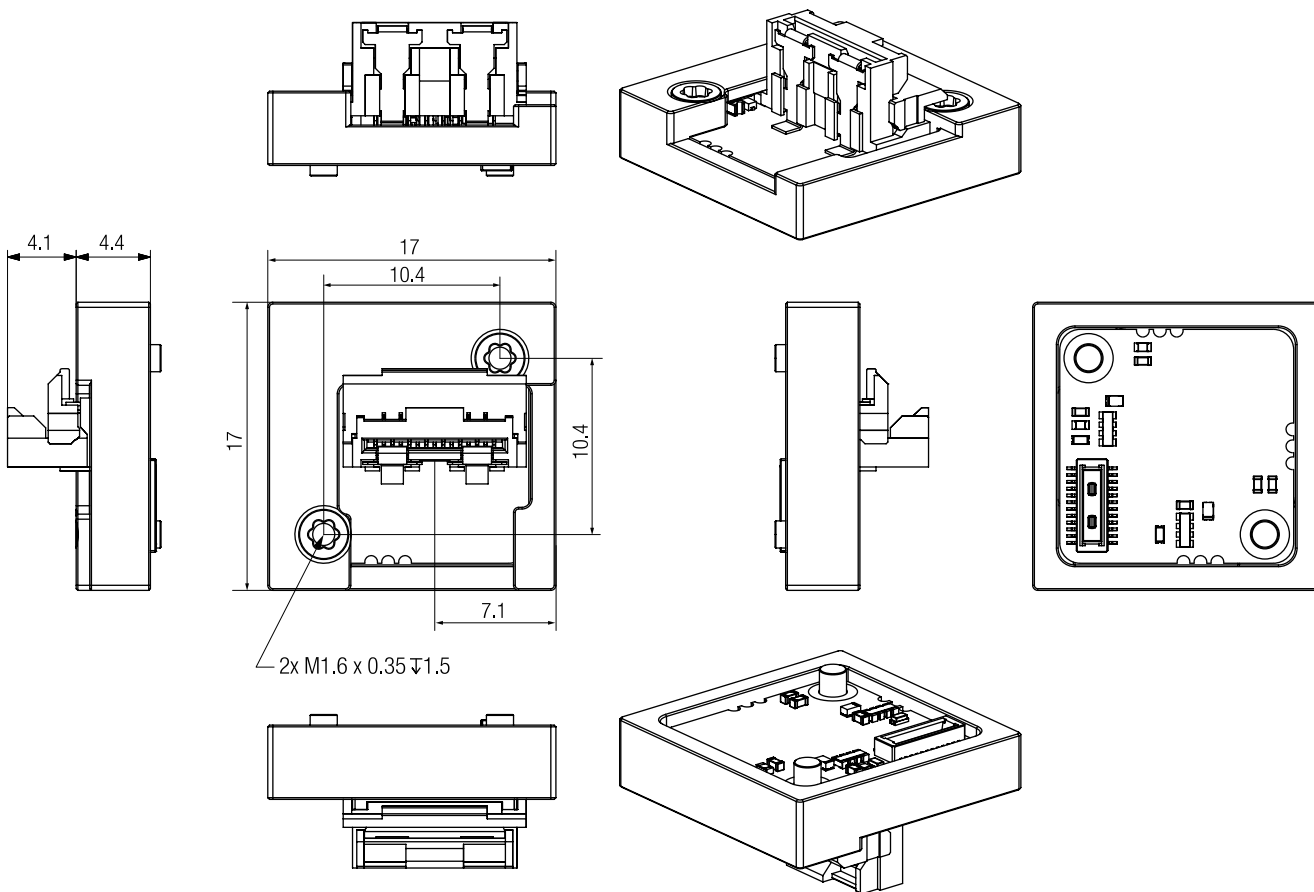


Figure 3: Dimensional drawing of ADPT-MU-17X17-CX3-FV

Width [ W ]	Height [ H ]	Depth [ D ]	Mass [ M ]	Material
17 mm	17 mm	4.4 / 8.5 mm	2.5 g	Machined Aluminum alloy <sup>1</sup>

<sup>1</sup>Anodized to black color

Table 2: Parameters of ADPT-MU-17X17-CX3-FV

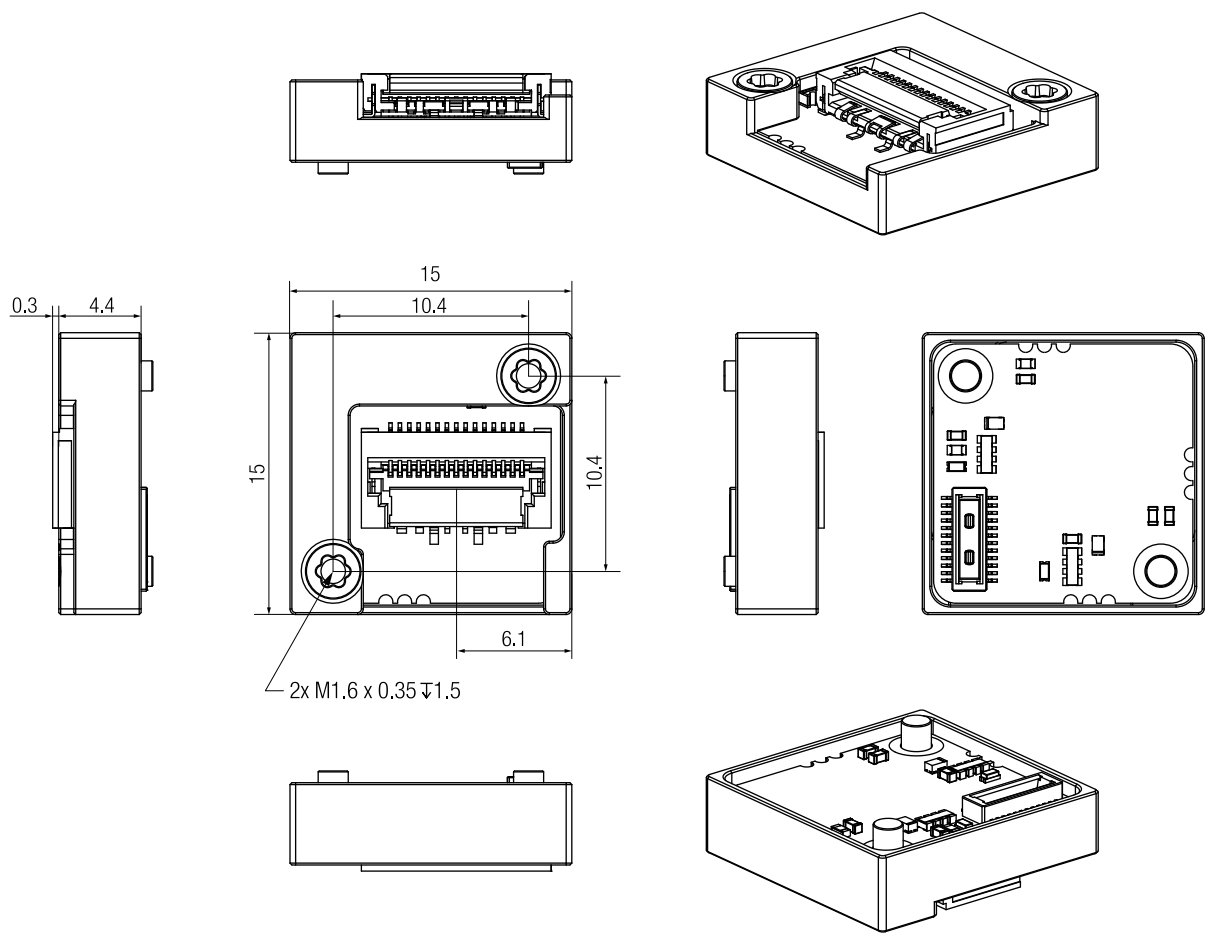


Figure 4: Dimensional drawing of ADPT-MU-CX3-FL

Width [ W ]	Height [ H ]	Depth [ D ]	Mass [ M ]	Material
15 mm	15 mm	4.4 / 4.7 mm	1.7 g	Machined Aluminum alloy <sup>1</sup>

<sup>1</sup>Anodized to black color

Table 3: Parameters of ADPT-MU-CX3-FL

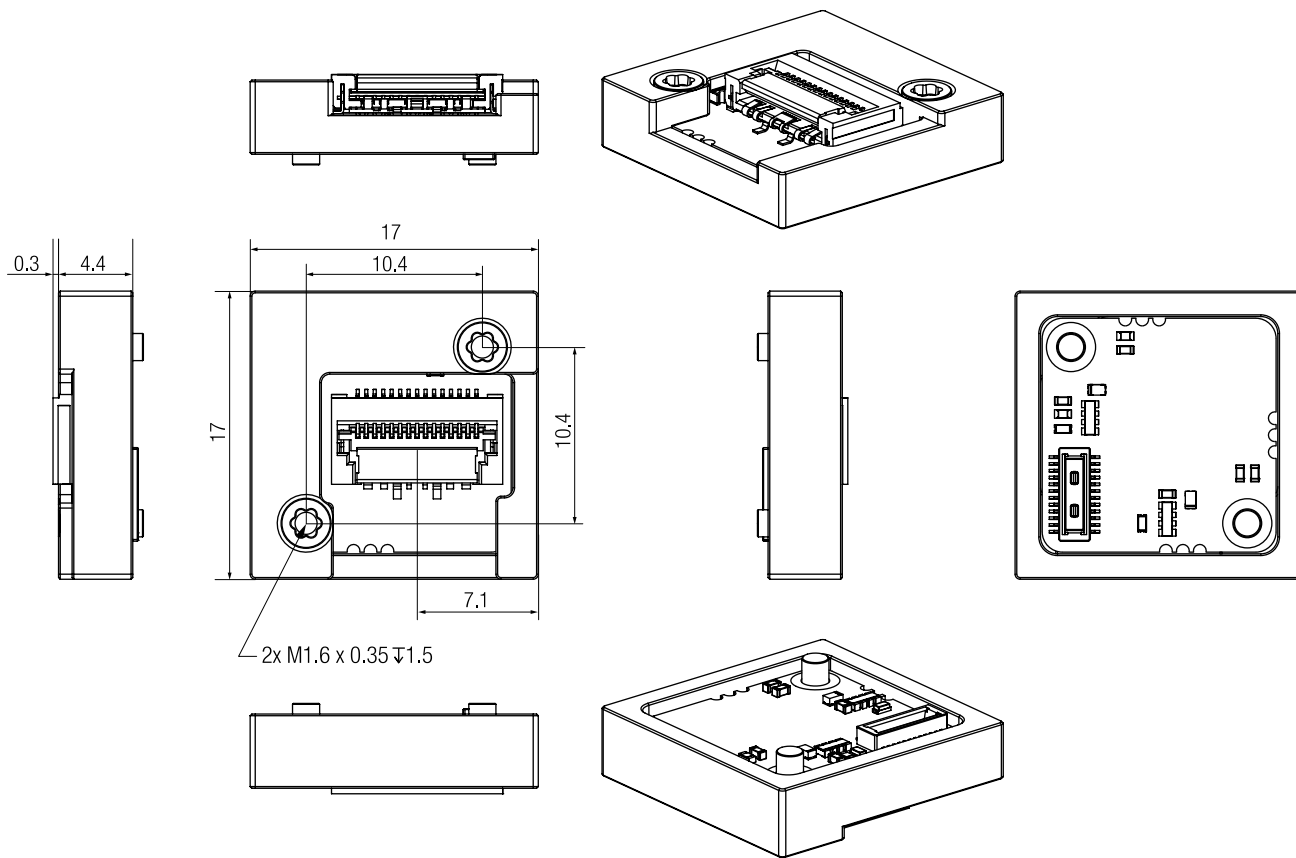


Figure 5: Dimensional drawing of ADPT-MU-17X17-CX3-FL

Width [ W ]	Height [ H ]	Depth [ D ]	Mass [ M ]	Material
17 mm	17 mm	4.4 / 4.7mm	2.4 g	Machined Aluminum alloy <sup>1</sup>

<sup>1</sup>Anodized to black color

Table 4: Parameters of ADPT-MU-17X17-CX3-FL

### 3 Connectors

#### 3.1 Location of connectors

Item	Value
Connector	Molex 502244-15300 (-FL), Molex 502231-1500 (-FV)
Signals	USB 3.1 Gen1, power, IO
Mating cables	CBL-MQ-FL-0M1, CBL-MQ-FL-0M25, CBL-USB3FLEX-0M10, CBL-USB3FLEX-0M25, CBL-USB3FLEX-0M50

Table 5: ADPT-MU-CX3-FL / ADPT-MU-CX3-FV connectors description

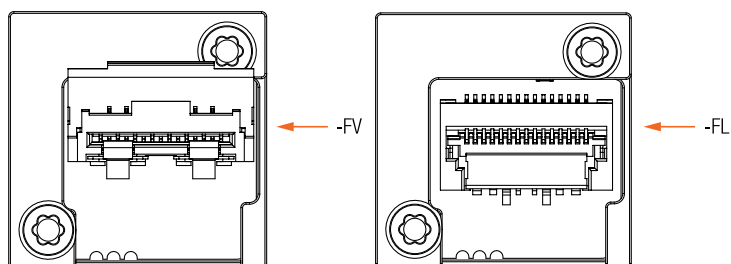


Figure 6: Flex connectors location ADPT-MU-CX3-FL / ADPT-MU-CX3-FV

## 3.2 Data interfaces

### 3.2.1 Flex cable interface

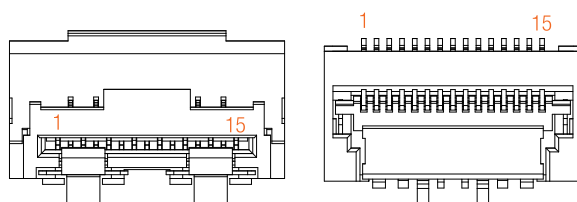


Figure 7: ADPT-MU-CX3-FL / ADPT-MU-CX3-FV connectors pinout

Pin	Signal	GPI/GPO index API	Description
1	GND	None	Ground for power return and for SuperSpeed signal return
2	SSRX-	None	SuperSpeed receiver differential pair; Accepted SSRX+
3	SSRX+	None	SuperSpeed receiver differential pair; Accepted SSRX-
4	GND	None	Ground for power return and for SuperSpeed signal return
5	SSTX+	None	SuperSpeed transmitter differential pair; Accepted SSTX-
6	SSTX-	None	SuperSpeed transmitter differential pair; Accepted SSTX+
7	GND	None	Ground for power return and for SuperSpeed signal return
8	D+	None	USB 2.0 differential pair
9	D-	None	USB 2.0 differential pair
10	GND	None	Ground for power return and for SuperSpeed signal return
11	VBUS	None	5 V Power input
12	VBUS	None	5 V Power input
13	OUT1	-/1	Non isolated TTL Output
14	IN/OUT GND	None	Common pole (IO Ground)
15	INOUT1	2/2	Non isolated Input/Output (<0.3 Low; > 1.3 High)
Ground pins	SGND	None	Shield of FPC cable connected to shield of host controller

Table 6: ADPT-MU-CX3-FL / ADPT-MU-CX3-FV connectors pin assignment

### 3.2.2 GPIO

#### Digital Input/Output (INOUT)

Item	Parameter / Note
Maximal input voltage	24 V DC
Common pole	YES
Effect of incorrect input terminal connection	Reverse voltage polarity protected
Effects when withdrawing/inserting input module under power	no damage, no lost data
Protection	Reverse voltage
Input Impedance- minimum	15 k $\Omega$
Input Level for logical 0	< 0.3 V
Input Level for logical 1	> 1.3 V
Input debounce filter	NO
Input delay - rising edge	<300 ns / VINPUT=2 V
Input delay - falling edge	<450 ns / VINPUT=2 V
Output Impedance- minimum	15 k $\Omega$
Output Level for logical 0	< 0.3 V, Rload = 100 k $\Omega$
Output Level for logical 1	> 1.6 V, Rload = 100 k $\Omega$
Output delay - rising edge	<100 $\mu$ s, Rload = 100 k $\Omega$ , AMBIENT=25 °C
Output delay - falling edge	<100 $\mu$ s, Rload = 100 k $\Omega$ , AMBIENT=25 °C

Table 7: General info for digital input, ADPT-MU-CX3-FL / ADPT-MU-CX3-FV adapters

#### Digital Output (OUT)

Item	Parameter / Note <sup>1</sup>
Common pole	YES
Effects when withdrawing/inserting input module under power	May damage camera electronics
Protection	ESD and short circuit <sup>2</sup>
Maximal output sink current	20 mA
Inductive loads	NO
Output Level logical 0	< 0.8 V, Load 100 k $\Omega$
Output Level logical 1	> 4.5 V, Load 100 k $\Omega$
Output delay - rising edge	<20 ns, Load 100 k $\Omega$ threshold 1.5 V
Output delay - falling edge	<20 ns, Load 100 k $\Omega$ threshold 0.5 V

<sup>1</sup>Note that the GPO signals are routed through unidirectional level translators, therefore High Impedance GPO mode setting is not supported

<sup>2</sup>ESD HBM ANSI/ESDA/JEDEC JS-001 Class 2 exceeds 2 kV; CDM JESD22-C101E exceeds 1000 V

Table 8: General info for digital output, ADPT-MU-CX3-FL / ADPT-MU-CX3-FV adapters

## 4 Quickstart guide

### 4.1 Hardware setup

#### 4.1.1 Essential components

- camera with adapter ADPT-MU-CX3-TC-FV / Adapter ADPT-MU-CX3-FL (or 17 mm version)
- CBL-MQ-FL-0M1 or CBL-MQ-FL-0M25
- host adapter (e.g. BOB-MQ-FL)
- host PC

#### 4.1.2 Connecting the components

Cables CBL-MQ-FL-xxx have marked ends. It is important to connect the end marked “CAM” to the camera and the end marked “BOB” to the host or adapter. Swapped orientation can cause damage to the camera.

Adapter connectors are equipped with a locking mechanism. When locked, pulling the cable may lead to damage to the connector or the camera. When manipulating the cable, the power supply for the camera must be turned off.

- Step 1.** Open the lock on the connector
- Step 2.** Insert flex cable (e.g. CBL-MQ-FL-0M1) to the camera
- Step 3.** Close the connector lock
- Step 4.** Connect cable to the host adapter BOB-MQ-FL
- Step 5.** Connect host adapter to pc via USB cable
- Step 6.** Turn on the computer

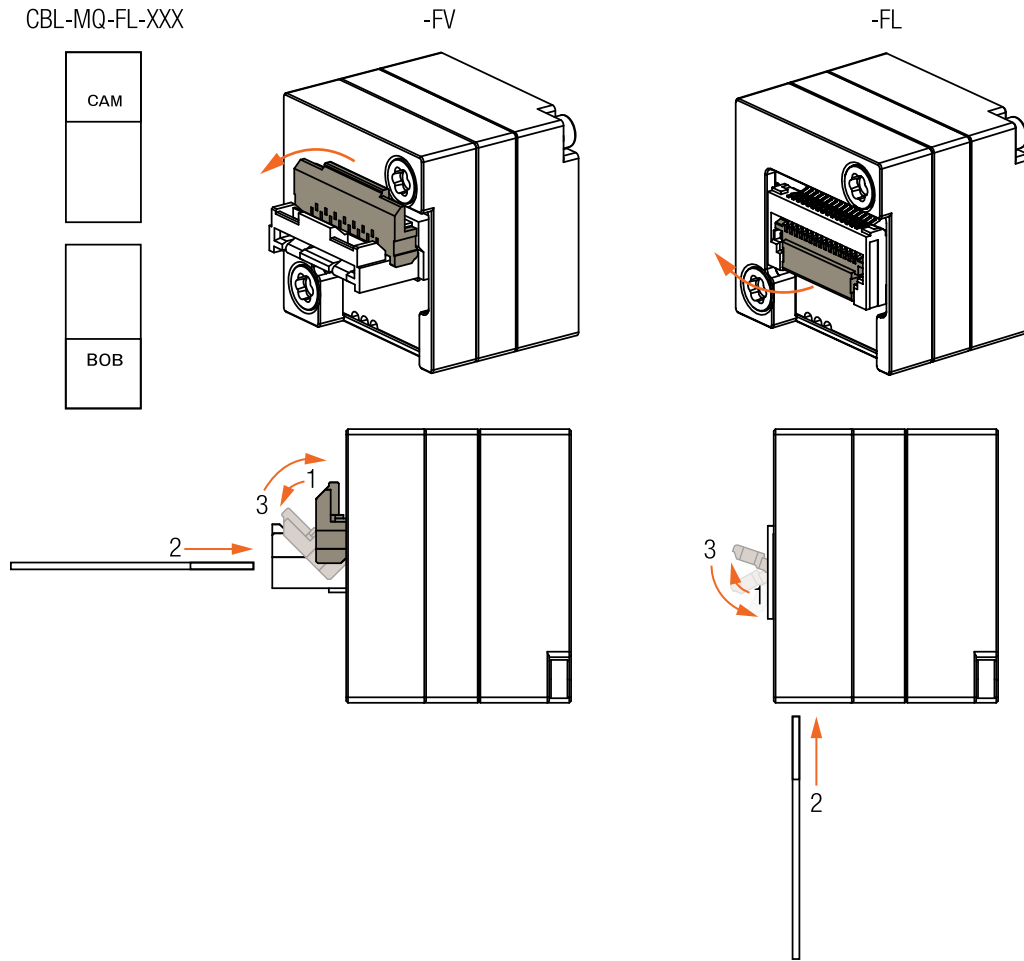


Figure 8: Connecting steps

For more information about ADPT-MU-CX3-Fx please contact: [sales@ximea.com](mailto:sales@ximea.com).

# List of Figures

1	Isometric view of adapters .....	4
2	Dimensional drawing of ADPT-MU-CX3-FV .....	5
3	Dimensional drawing of ADPT-MU-17X17-CX3-FV .....	6
4	Dimensional drawing of ADPT-MU-CX3-FL .....	7
5	Dimensional drawing of ADPT-MU-17X17-CX3-FL .....	8
6	Flex connectors location ADPT-MU-CX3-FL / ADPT-MU-CX3-FV .....	9
7	ADPT-MU-CX3-FL / ADPT-MU-CX3-FV connectors pinout .....	10
8	Connecting steps .....	13

# List of Tables

- 1 Parameters of ADPT-MU-CX3-FV ..... 5
- 2 Parameters of ADPT-MU-17X17-CX3-FV..... 6
- 3 Parameters of ADPT-MU-CX3-FL ..... 7
- 4 Parameters of ADPT-MU-17X17-CX3-FL..... 8
- 5 ADPT-MU-CX3-FL / ADPT-MU-CX3-FV connectors description ..... 9
- 6 ADPT-MU-CX3-FL / ADPT-MU-CX3-FV connectors pin assignment ..... 10
- 7 General info for digital input, ADPT-MU-CX3-FL / ADPT-MU-CX3-FV adapters ..... 11
- 8 General info for digital output, ADPT-MU-CX3-FL / ADPT-MU-CX3-FV adapters ..... 11



