

- **ADPT-MU-CX3-UC**
MicroCoaxial adapter for MU

Introductions

About this manual

Dear customer,

Thank you for purchasing a product from XIMEA.

We hope that this manual can answer your questions, but should you have any further queries or if you wish to claim a service or warranty case, please contact your local dealer or refer to XIMEA Support on our website: www.ximea.com/support

The purpose of this document is to provide a description of XIMEA Accessories and to describe the correct way to install related software, drivers and run it successfully. Please read this manual thoroughly before operating your new XIMEA Accessories for the first time. Please follow all instructions and observe the warnings.

This document is subject to change without notice.

About XIMEA

XIMEA is one of the worldwide leaders for innovative camera solutions with a 30-year history of research, development and production of digital image acquisition systems. Based in Slovakia, Germany and the US, with a global distributor network, XIMEA offers their cameras worldwide. In close collaboration with customers XIMEA has developed a broad spectrum of technologies and cutting-edge, highly competitive products.

XIMEA's camera centric technology portfolio comprises a broad spectrum of digital technologies, from data interfaces such as USB 2.0, USB 3.1 and PCIe to cooled digital cameras with CCD, CMOS and sCMOS sensors, as well as X-ray cameras.

XIMEA has three divisions – generic machine vision and integrated vision systems, scientific imaging and OEM/custom.

Our broad portfolio of cameras includes thermally stabilized astronomy and x-ray cameras, as well as specialty cameras for medical applications, research, surveillance and defense.

Contact XIMEA

XIMEA is a worldwide operating company

Headquarters, Sales worldwide

XIMEA GmbH
Am Mittelhafen 16
48155 Münster
Germany

Tel: +49 (251) 202 408-0
Fax: +49 (251) 202 408-99

Web www.ximea.com
General inquiries info@ximea.com
Sales sales@ximea.com
Support [XIMEA Support](#)

Sales America

XIMEA Corp.
12600 W Colfax Ave., Suite A-130
Lakewood, CO 80215
USA

Tel: +1 (303) 389-9838
Fax: +1 (303) 202-6350

R&D, Production

XIMEA s.r.o.
Lesná 52
900 33 Marianka
Slovakia

Tel: +421 (2) 205 104 26
Fax: +421 (2) 205 104 27

Contents

About this manual	2
About XIMEA	2
Contact XIMEA	2
1 General description	4
2 Dimensional drawings	5
3 Connectors	7
3.1 Location of connectors	7
3.2 Data interfaces	8
3.2.1 Micro Coaxial cable interface.....	8
3.2.2 GPIO.....	9
4 Quickstart guide	10
4.1 Hardware setup	10
4.1.1 Essential components.....	10
4.1.2 Connecting the components	10
List of figures	11
List of tables	12

1 General description

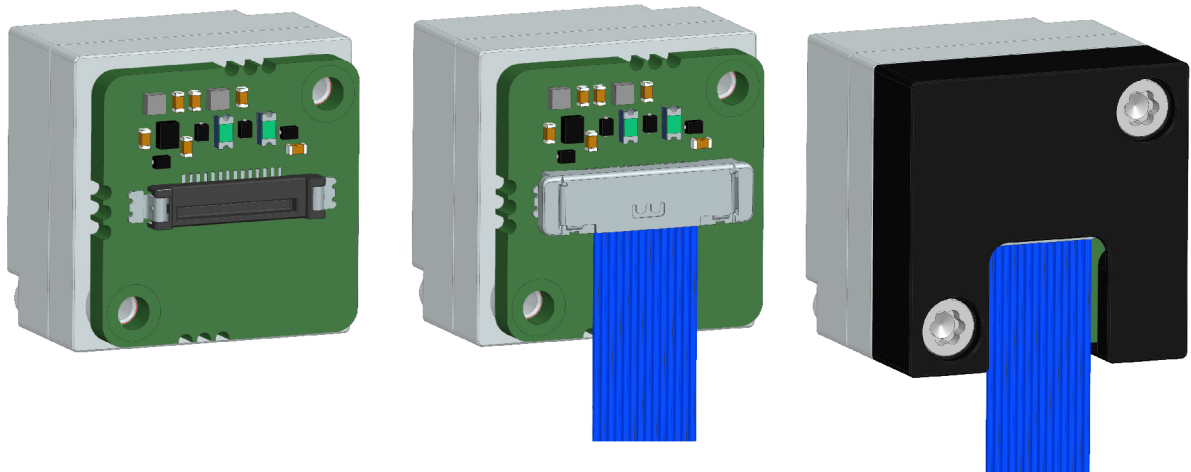


Figure 1: Isometric view of adapter

The adapter is designed to connect small MU cameras 15×15 mm or 17×17 mm via the ximea proprietary flex line interface. The interface connector is compatible with -UC accessories. Allowing triggering and output signaling from the camera. The adapter is mounted on the camera rear using 2x M1.6x5 countersunk TRX screws.

2 Dimensional drawings

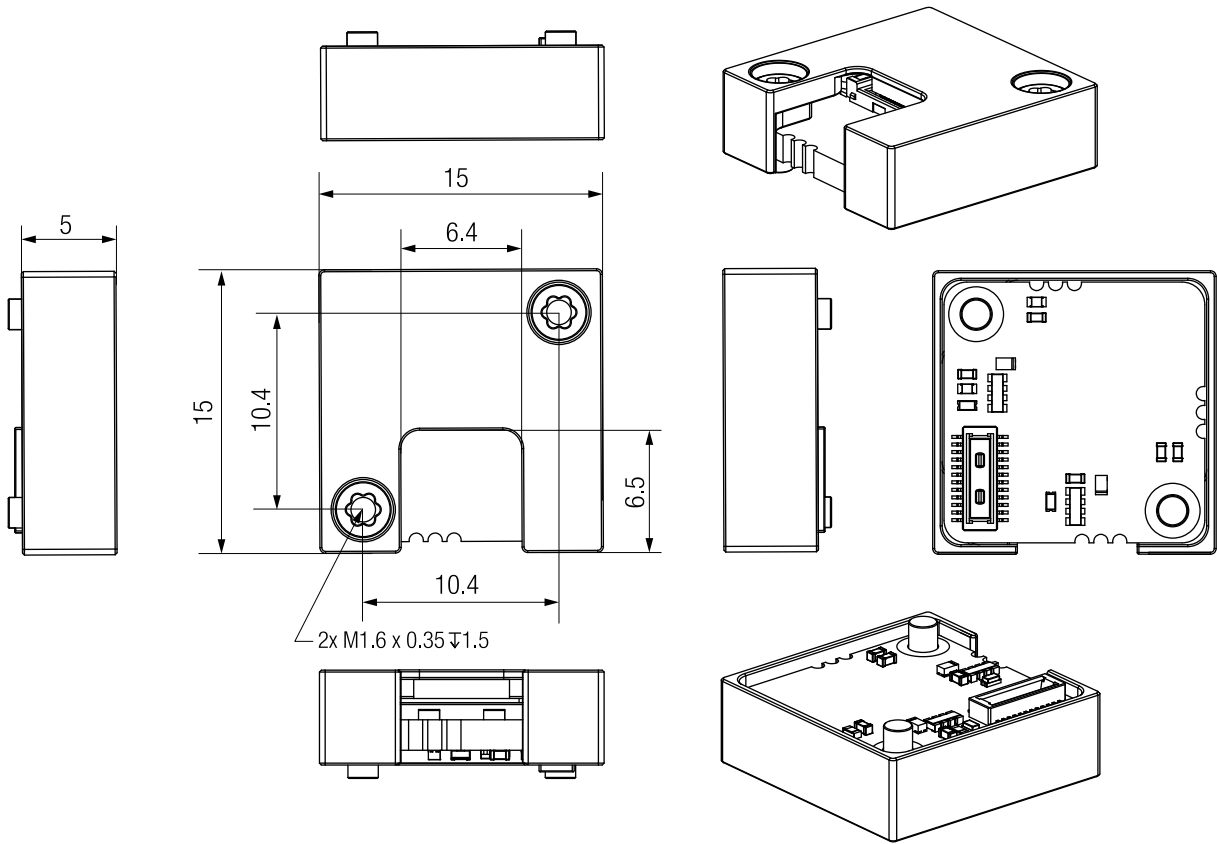


Figure 2: Dimensional drawing of ADPT-MU-CX3-UC

Width [W]	Height [H]	Depth [D]	Mass [M]	Material
15 mm	15 mm	5.0 mm	1.8 g	Machined Aluminum alloy ¹

¹Anodized to black color

Table 1: Parameters of ADPT-MU-CX3-UC

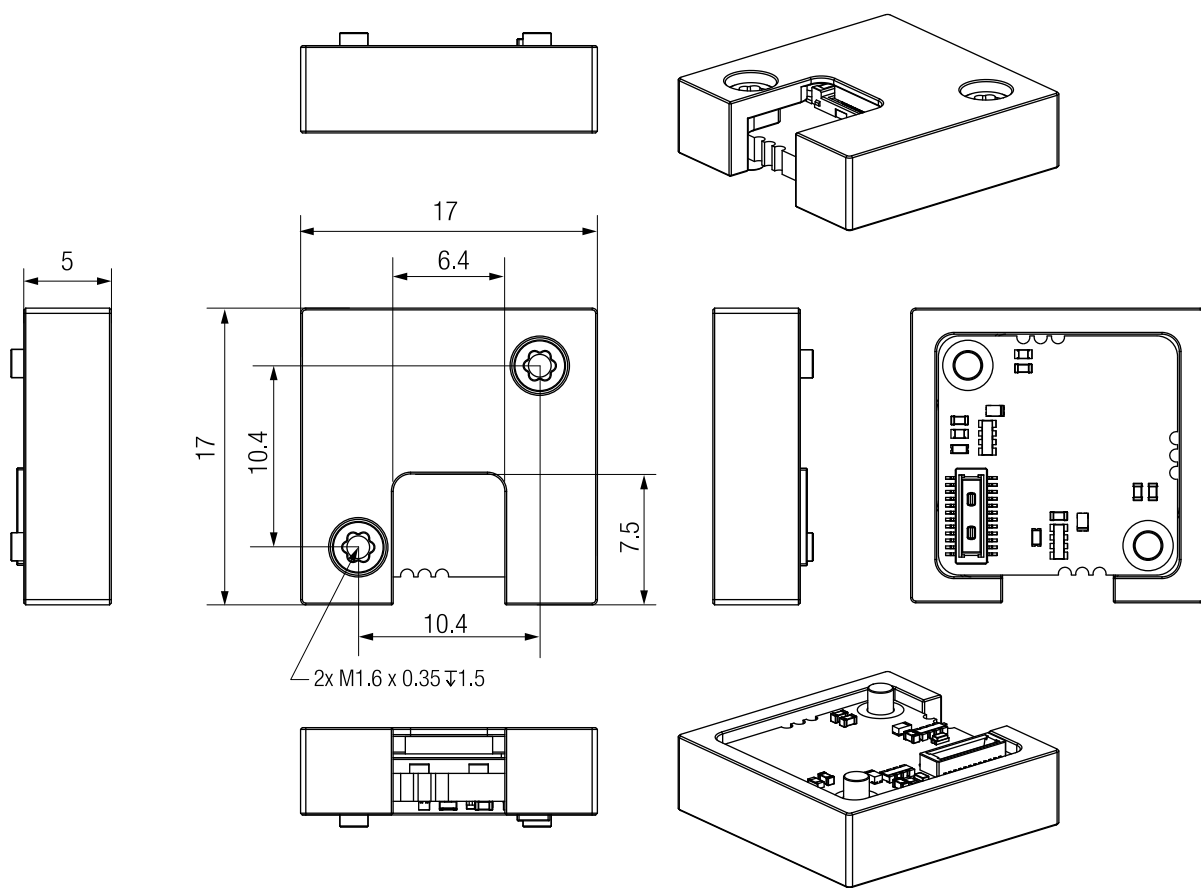


Figure 3: Dimensional drawing of ADPT-MU-17X17-CX3-UC

Width [W]	Height [H]	Depth [D]	Mass [M]	Material
17 mm	17 mm	5.0 mm	2.6 g	Machined Aluminum alloy ¹

¹Anodized to black color

Table 2: Parameters of ADPT-MU-17X17-CX3-UC

3 Connectors

3.1 Location of connectors

Item	Value
Connectors	Future Electronics 20374-R14E-31
Signals	USB 3.1 Gen1, power, IO
Mating cables	CBL-U3-PSD-UC-0M10, CBL-U3-PSD-UC-0M25, CBL-U3-PSD-UC-0M50, CBL-U3-PSD-UC-1M0 ¹

¹Cables up to 1 m in length are supported when cameras are directly connected to the xSwitch (e.g., XS-5P-U3-UC-TC). However, when cameras are connected via the ADPT-U3-UC-U3-UB, the maximum supported length of the micro coaxial cable depends on the VBUS voltage provided by the USB 3.0 controller and the length of the USB 3.0 cable used between the ADPT-U3-UC-U3-UB and the USB 3.0 controller.

Table 3: ADPT-MU-CX3-UC connector description

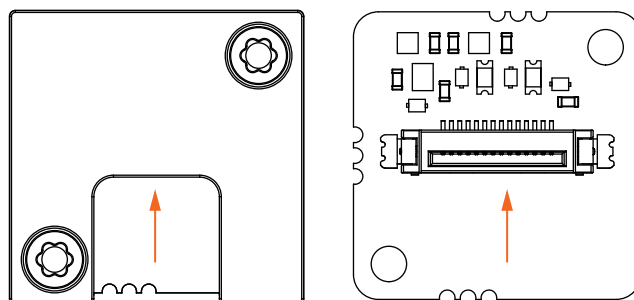


Figure 4: Location of connector

3.2 Data interfaces

3.2.1 Micro Coaxial cable interface




Figure 5: ADPT-MU-CX3-UC connector pinout

Pin	Signal	GPI/GPO index API	Description
1	VBUS	None	+5 V Power input
2	VBUS	None	+5 V Power input
3	INOUT2	4/4	Non-isolated Input/Output 2
4	OUT2	-/3	Non-isolated Output 2
5	SSRX+	None	SuperSpeed receiver differential pair
6	SSRX-	None	SuperSpeed receiver differential pair
7	D+	None	2.0 differential pair
8	D-	None	2.0 differential pair
9	SSTX+	None	SuperSpeed transmitter differential pair
10	SSTX-	None	SuperSpeed transmitter differential pair
11	INOUT1	2/2	Non-isolated Input/Output 1
12	OUT1	-/1	Non-isolated Output 1
13	VBUS	None	+5 V Power input
14	VBUS	None	+5 V Power input

Table 4: ADPT-MU-CX3-UC connector pin assignment

3.2.2 GPIO

Digital Input/Output (INOUT)

Item	Parameter / Note
Maximal input voltage	24V DC
Common pole	YES
Effect of incorrect input terminal connection	Reverse voltage polarity protected
Effects when withdrawing/inserting input module under power	no damage, no lost data
Protection	Reverse voltage
Input Impedance- minimum	15 k Ω
Input Level for logical 0	< 0.3V
Input Level for logical 1	> 1.3V
Input debounce filter	NO
Input delay - rising edge	< 300 ns, VINPUT=2V
Input delay - falling edge	< 450 ns, VINPUT=2V

Table 5: General info for digital input / output, ADPT-MU-CX3-UC adapter

Digital Output (OUT)

Item	Parameter / Note ¹
Common pole	YES
Effects when withdrawing/inserting input module under power	May damage camera electronics
Protection	ESD and short circuit ²
Maximal output sink current	20 mA
Inductive loads	NO
Output Level logical 0	< 0.8 V, Load 100 k Ω
Output Level logical 1	> 4.5 V, Load 100 k Ω
Output delay - rising edge	< 20 ns, Load 100 k Ω threshold 1.5 V
Output delay - falling edge	< 20 ns, Load 100 k Ω threshold 0.5 V

¹Note that the GPO signals are routed through unidirectional level translators, therefore High Impedance GPO mode setting is not supported

²ESD HBM ANSI/ESDA/JEDEC JS-001 Class 2 exceeds 2 kV; CDM JESD22-C101E exceeds 1000 V

Table 6: General info for digital output, ADPT-MU-CX3-UC adapter

4 Quickstart guide

4.1 Hardware setup

4.1.1 Essential components

- small MU camera with adapter ADPT-MU-CX3-UC or ADPT-MU-17X17-CX3-UC
- Micro Coaxial cable (CBL-U3-PSD-UC-0M10)
- adapter board (e.g. ADPT-U3-UC-U3-UB) for connecting ADPT-MU-CX3-UC to PC
- host (PC)

4.1.2 Connecting the components

- Step 1.** Connect micro coaxial cable (CBL-U3-PSD-UC-0M10) to the camera
- Step 2.** Connect the other side of the cable to adapter (e.g. ADPT-U3-UC-U3-UB)
- Step 3.** Connect ADPT-U3-UC-U3-UB via USB cable to the host (pc)
- Step 4.** Turn on the computer

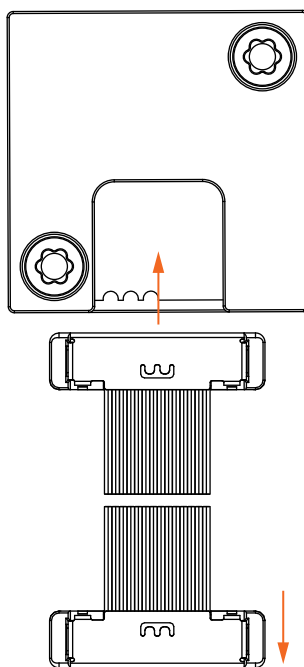


Figure 6: Connecting steps

For more information about ADPT-MU-CX3-UC please contact: sales@ximea.com.

List of Figures

- 1 Isometric view of adapter 4
- 2 Dimensional drawing of ADPT-MU-CX3-UC..... 5
- 3 Dimensional drawing of ADPT-MU-17X17-CX3-UC 6
- 4 Location of connector 7
- 5 ADPT-MU-CX3-UC connector pinout 8
- 6 Connecting steps 10

List of Tables

- 1 Parameters of ADPT-MU-CX3-UC 5
- 2 Parameters of ADPT-MU-17X17-CX3-UC 6
- 3 ADPT-MU-CX3-UC connector description 7
- 4 ADPT-MU-CX3-UC connector pin assignment 8
- 5 General info for digital input / output, ADPT-MU-CX3-UC adapter 9
- 6 General info for digital output, ADPT-MU-CX3-UC adapter 9



