


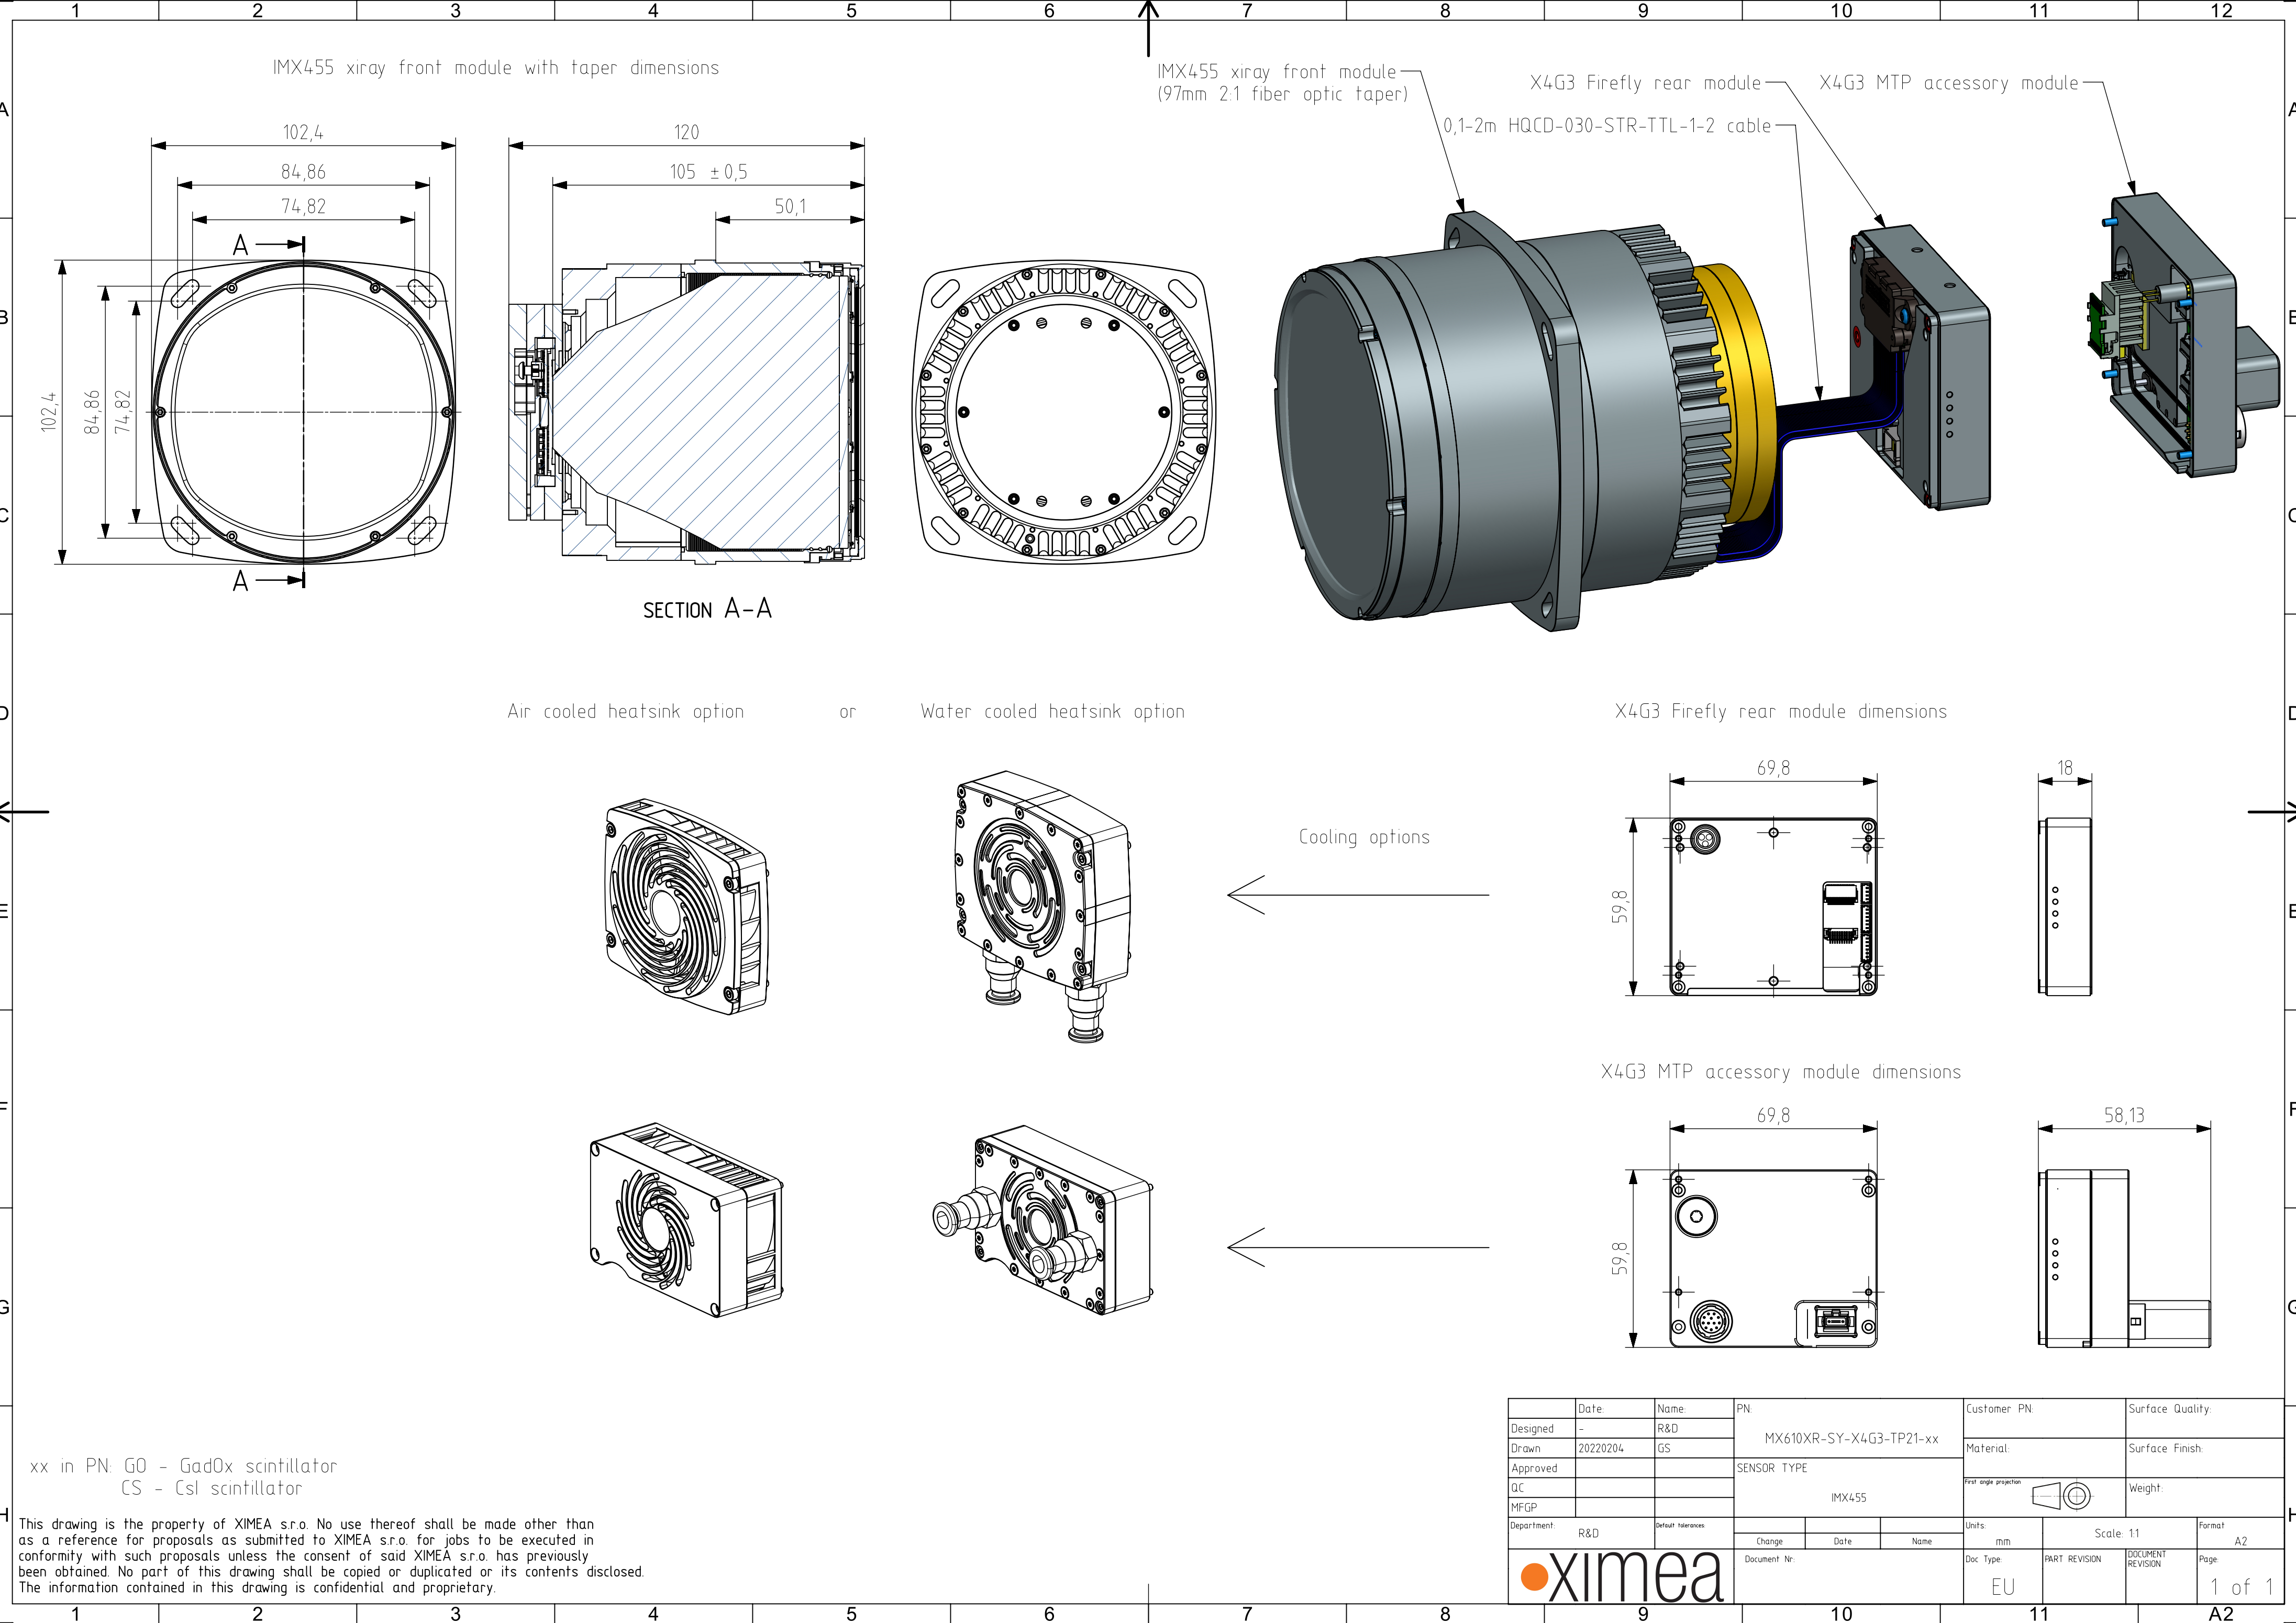

IMX455 xiray front module with taper dimensions

IMX455 xiray front module
(97mm 2:1 fiber optic taper)

X4G3 Firefly rear module

X4G3 MTP accessory module

0,1-2m HQCD-030-STR-TTL-1-2 cable

SECTION A-A

Air cooled heatsink option

or

Water cooled heatsink option

X4G3 Firefly rear module dimensions

Cooling options

X4G3 MTP accessory module dimensions

xx in PN: GO - GadOx scintillator
CS - CsI scintillator

This drawing is the property of XIMEA s.r.o. No use thereof shall be made other than as a reference for proposals as submitted to XIMEA s.r.o. for jobs to be executed in conformity with such proposals unless the consent of said XIMEA s.r.o. has previously been obtained. No part of this drawing shall be copied or duplicated or its contents disclosed. The information contained in this drawing is confidential and proprietary.

	Date:	Name:	PN:	Customer PN:	Surface Quality:
Designed	-	R&D	MX610XR-SY-X4G3-TP21-xx		
Drawn	20220204	GS		Material:	Surface Finish:
Approved			SENSOR TYPE	First angle projection	Weight:
QC			IMX455		
MFGP					
Department:	R&D	Default tolerances		Units:	Scale: 1:1
				mm	Format
					A2
			Document Nr:	Doc Type:	PART REVISION
				EU	DOCUMENT REVISION
					Page:
					1 of 1