

XS-8P-X2G2-FF-X8G3-MTP
Multi camera platform

XIMEA Accessories
Technical Manual
Version v260903

Introductions

About this manual

Dear customer,

Thank you for purchasing a product from XIMEA.

We hope that this manual can answer your questions, but should you have any further queries or if you wish to claim a service or warranty case, please contact your local dealer or refer to XIMEA Support on our website: www.ximea.com/support

The purpose of this document is to provide a description of XIMEA Accessories and to describe the correct way to install related software, drivers and run it successfully. Please read this manual thoroughly before operating your new XIMEA Accessories for the first time. Please follow all instructions and observe the warnings.

This document is subject to change without notice.

About XIMEA

XIMEA is one of the worldwide leaders for innovative camera solutions with a 30-year history of research, development and production of digital image acquisition systems. Based in Slovakia, Germany and the US, with a global distributor network, XIMEA offers their cameras worldwide. In close collaboration with customers XIMEA has developed a broad spectrum of technologies and cutting-edge, highly competitive products.

XIMEA's camera centric technology portfolio comprises a broad spectrum of digital technologies, from data interfaces such as USB 2.0, USB 3.1 and PCIe to cooled digital cameras with CCD, CMOS and sCMOS sensors, as well as X-ray cameras.

XIMEA has three divisions – generic machine vision and integrated vision systems, scientific imaging and OEM/custom.

Our broad portfolio of cameras includes thermally stabilized astronomy and x-ray cameras, as well as specialty cameras for medical applications, research, surveillance and defense.

Contact XIMEA

XIMEA is a worldwide operating company

Headquarters, Sales worldwide	Sales America	R&D, Production
XIMEA GmbH Am Mittelhafen 16 48155 Münster Germany	XIMEA Corp. 12600 W Colfax Ave., Suite A-130 Lakewood, CO 80215 USA	XIMEA s.r.o. Lesná 52 900 33 Marianka Slovakia
Tel: +49 (251) 202 408-0 Fax: +49 (251) 202 408-99	Tel: +1 (303) 389-9838 Fax: +1 (303) 202-6350	Tel: +421 (2) 205 104 26 Fax: +421 (2) 205 104 27

Web	www.ximea.com
General inquiries	info@ximea.com
Sales	sales@ximea.com
Support	XIMEA Support

Contents

About this manual 2
About XIMEA 2
Contact XIMEA 2

1 General description 4

2 Dimensional drawings 5

3 Configuration 6
3.1 DIP switches 6

4 Connectors 7
4.1 Location of connectors 7
4.2 Data interfaces 8
4.2.1 FireFly connector 8
4.2.2 MTP optical fiber connector 10
4.2.3 Power connector 11
4.3 GPIO 12
4.3.1 GPI / GPO connectors 12
4.3.2 External GPIO connector 13

5 IO-subsystem 14
5.1 Internal power supply 14
5.2 Circuitry requirement 14
5.3 Synchronization mode selection 14
5.4 IO configuration 15
5.4.1 Trigger input configuration 15
5.4.2 Trigger output configuration 15
5.5 Signal level 16
5.5.1 ISO_GPI signal level 16
5.5.2 ISO_GPO signal level 16
5.5.3 ISO_GPO_5V0 signal level 16

6 Usages 17
6.1 Buttons 17
6.1.1 Trigger button 17
6.1.2 PCIe reset button 17

7 Additional information 18
7.1 Cables 18
7.1.1 CBL-MTP-X8G3-FF-10M0 18
7.1.2 CBL-PCUO-X8G3-0M15 18
7.1.3 CBL-ECUE-X4G3-1M0/2M0/3M0 18
7.2 Handling precautions 18
7.2.1 ESD precautions 19
7.2.2 Heat dissipation 19
7.3 Scope of delivery 19

8 Quickstart guide 20
8.1 Hardware setup 20
8.1.1 Essential components 20
8.1.2 Connecting the components 20

List of figures 21

List of tables 22

1 General description

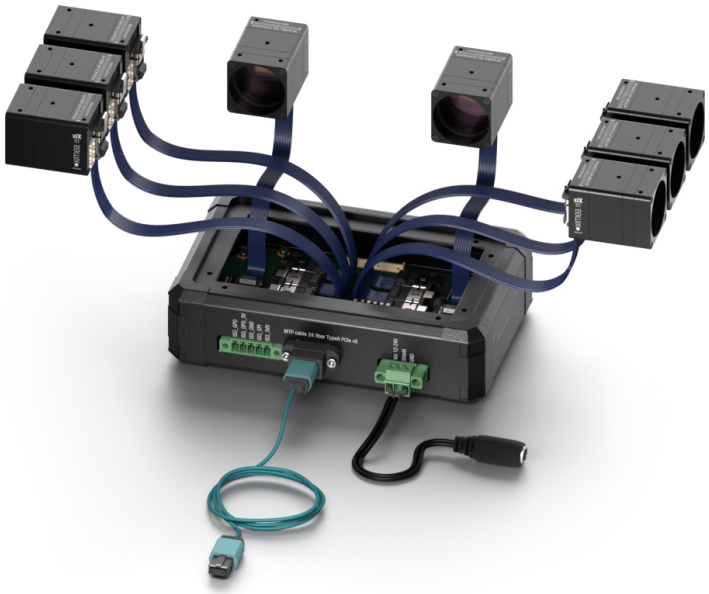


Figure 1: xSWITCH XS-8P-X2G2-FF-X8G3-MTP

The xiSwitch XS-8P-X2G2-FF-X8G3-MTP is a multi-camera platform designed for high-performance synchronization of up to 8 cameras equipped with FireFly connectors from xiX family.

The power cable for connecting the switch to the power source is included in the delivery kit, see Scope of delivery for details. FireFly cables (e.g. CBL-ECUE-X4G3-1M0, CBL-ECUE-X4G3-2M0) provide length options of up to 3 m.

The xiSwitch XS-8P-X2G2-FF-X8G3-MTP features:

- Camera ports: 8x PCIe X2G2 FireFly Connectors with 10 Gbit bandwidth each for camera connections
- Host port: MTP Optical Connector (MTP Cable, 24 Fiber, Type-A, PCIe X8) with output bandwidth of 64 Gbit
- External power for reliable operation of connected cameras
- Communication, control, and synchronization through IO connector

The xiSwitch XS-8P-X2G2-FF-X8G3-MTPF is designed for a wide range of applications, including:

360 panorama, Augmented or Virtual Reality (AR, VR), Autonomous self-driving vehicles, Street/city mapping, Deep learning tasks, Stereo camera systems, 3D scanning, Entertainment, Photogrammetry, FACS scanning, Face and Motion capture, UAV / UAS (drones), Cinematography, Videogrammetry and more.

2 Dimensional drawings

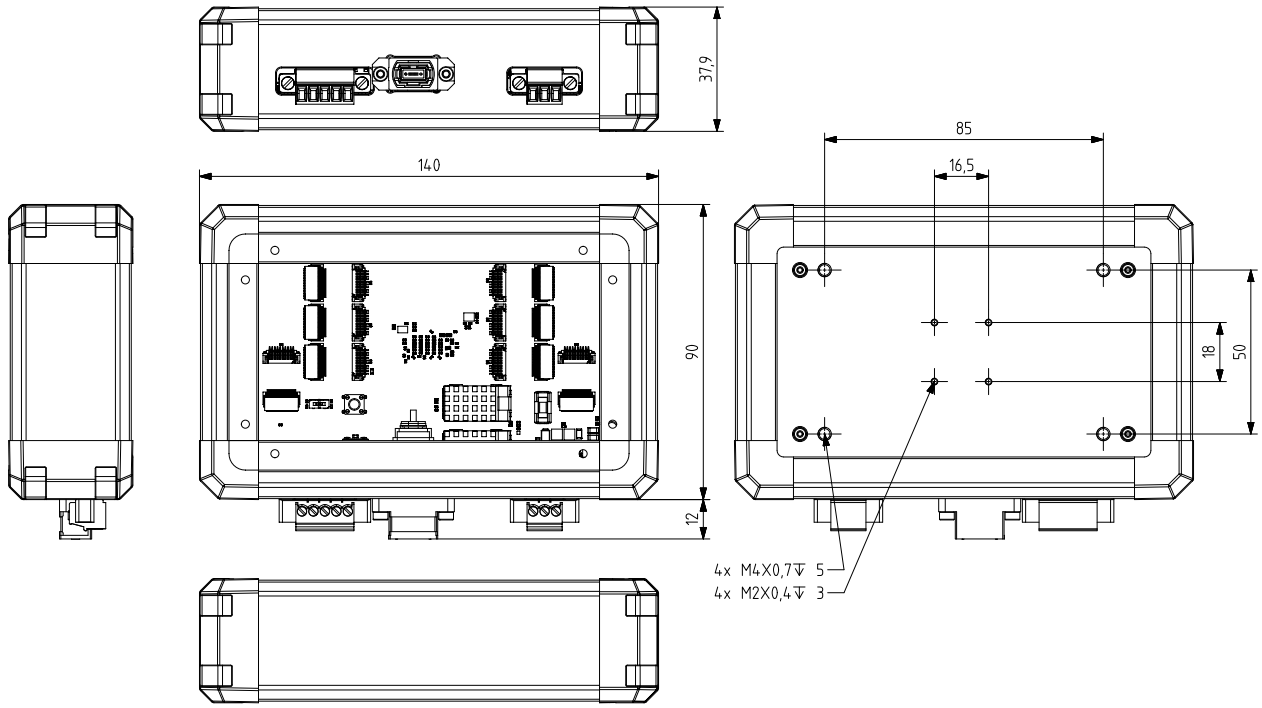


Figure 2: Dimensional drawing of XS-8P-X2G2-FF-X8G3-MTP

Width [W]	Height [H]	Depth [D]	Mass [M]	Material and technology
140 mm	102 mm	37.9 mm	TBD	Extruded aluminum

Table 1: Parameters and mass

3 Configuration

3.1 DIP switches

The numbering of the camera ports (1-8 PCIe) correspond to the number of the respective GPI and GPO dip switches (left side in the figure below). The DIP switches have annotation on their body. The description of DIP switches (GPI, GPO) is written directly on the PCB top layer.

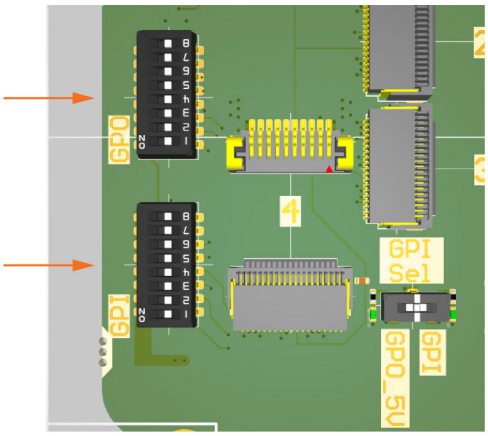


Figure 3: GPI / GPO DIP switches

The switch to select the synchronization mode is in the left bottom area, next to the annotation “GPI Sel” with two possible states - “GPI” and “GPO_5V”. For more information see section IO-subsystem.

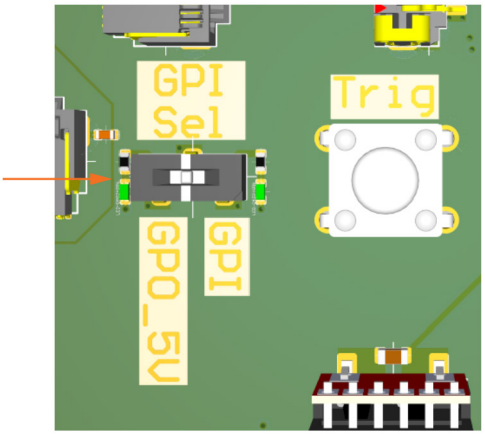


Figure 4: Switch for selecting synchronization mode

4 Connectors

4.1 Location of connectors

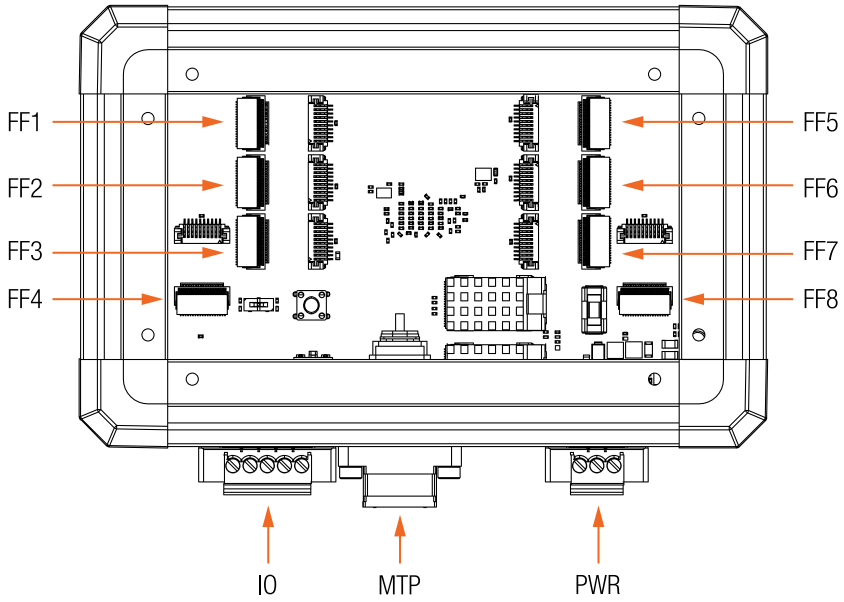


Figure 5: Conectors location

Name	Description
FF1-FF8	FireFly X2G2 camera connectors, Samtec (UEC5-019-1-H-D-RA-1-A + UCC8-010-1-H-S-1-A)
IO	5-pin IO connector, 1843826
MTP	MTP optical connector (MTP cable 24 fiber Type-A PCIe X8)
PWR	3-pin Power input connector, 1843800

Table 2: Location of connectors

4.2 Data interfaces

4.2.1 FireFly connector

Item	Value
Connector	Samtec (UEC5-019-1-H-D-RA-1-A + UCC8-010-1-H-S-1-A)
Signals	PCIe, IO, GND
Mating cables	Ximea PN: CBL-ECUE-X4G3-1M0, CBL-ECUE-X4G3-2M0

Table 3: FireFly connector description

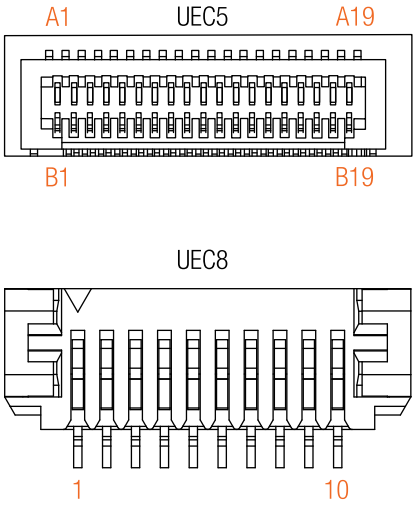


Figure 6: Firefly connector pinout

Pin	Name	Description
1	VCC_TX	TX Power output
2	GND	Ground
3	PRESENTL	Module presence detect
4	SELECT	Signal for selection
5	CPERST	PCIe reset signal
6	CPRSNT	Card presence detect
7	SDA	I2C data line
8	SCL	I2C clock line
9	GND	Ground
10	VCC_RX	RX power output

Table 4: FireFly connector UCC8 pin assignment

Pin	Name	Description	Pin	Name	Description
A1	GND	Signal and power ground	B1	GND	Signal and power ground
A2	PCIe_PETN_2	PCIe TX differential pair 2	B2	PCIe_PETN_3	PCIe TX differential pair 3
A3	PCIe_PETP_2	PCIe TX differential pair 2	B3	PCIe_PETP_3	PCIe TX differential pair 3
A4	GND	Signal	B4	GND	Signal and power ground
A5	PCIe_PETN_1	PCIe TX differential pair 1	B5	PCIe_PETN_0	PCIe TX differential pair 0
A6	PCIe_PETP_1	PCIe TX differential pair 1	B6	PCIe_PETP_0	PCIe TX differential pair 0
A7	GND	Signal and power ground	B7	GND	Signal and power ground
A8	SPARE	Unused/reserved pin	B8	PWR	Power input
A9	CPERST	PCIe reset signal	B9	PWR	Power input
A10	GND	Signal and power ground	B10	GND	Signal and power ground
A11	ISO_GND	Isolated Ground	B11	ISO_GND	Isolated Ground
A12	ISO_GPI	Isolated Input	B12	ISO_GPO	Isolated Output
A13	GND	Signal and power ground	B13	GND	Signal and power ground
A14	PCIe_PERP_2	PCIe RX differential pair 2	B14	PCIe_PERN_3	PCIe RX differential pair 3
A15	PCIe_PERN_2	PCIe RX differential pair 2	B15	PCIe_PERP_3	PCIe RX differential pair 3
A16	GND	Signal and power ground	B16	GND	Signal and power ground
A17	PCIe_PERP_1	PCIe RX differential pair 1	B17	PCIe_PERN_0	PCIe RX differential pair 0
A18	PCIe_PERN_1	PCIe RX differential pair 1	B18	PCIe_PERP_0	PCIe RX differential pair 0
A19	GND	Signal and power ground	B19	GND	Signal and power ground

Table 5: FireFly connector UEC5 pin assignment

4.2.2 MTP optical fiber connector

The MTP connector on the xSwitch is a 24-fiber male MTP connector. For proper operation, use MTP cables with a 24-fiber female connector, such as CBL-MTP-X8G3-FF-xxxM0, see Section CBL-MTP-X8G3-FF-10M0.

Item	Value
Connector	MTP Male 24-fiber connector (see CBL-PCUO-X8G3-0M15)
Signals	PCIe Gen3 x8, RX lanes, TX lanes
Mating Connectors	US Conec MTP (Pinless) Female connector
Mating Cable	Ximea PN: CBL-MTP-X8G3-FF-5M0, CBL-MTP-X8G3-FF-10M0, CBL-MTP-X8G3-FF-20M0, CBL-MTP-X8G3-FF-30M0, CBL-MTP-X8G3-FF-40M0, CBL-MTP-X8G3-FF-50M0

Table 6: MTP connector general description

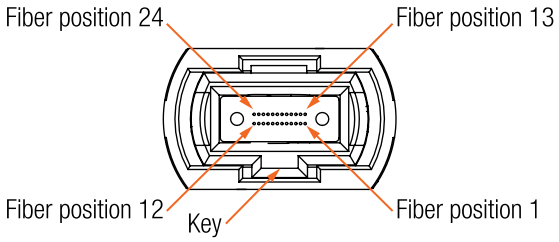


Figure 7: MTP connector pinout

Pin	Name	Description	Pin	Name	Description
1	Rx0	Receive channel 0	13	Tx0	Transmit channel 0
2	Rx1	Receive channel 1	14	Tx1	Transmit channel 1
3	Rx2	Receive channel 2	15	Tx2	Transmit channel 2
4	Rx3	Receive channel 3	16	Tx3	Transmit channel 3
5	NC	Not connected	17	NC	Not connected
6	NC	Not connected	18	NC	Not connected
7	NC	Not connected	19	NC	Not connected
8	NC	Not connected	20	NC	Not connected
9	Rx4	Receive channel 4	21	Tx4	Transmit channel 4
10	Rx5	Receive channel 5	22	Tx5	Transmit channel 5
11	Rx6	Receive channel 6	23	Tx6	Transmit channel 6
12	Rx7	Receive channel 7	24	Tx7	Transmit channel 7

Table 7: MTP connector pin assignment

4.2.3 Power connector

Item	Value
Connector	CONN Header Block 3-POS, 3.5MM, Right Angle, 250V/8A, THT, 1843800
Signals	Power, GND
Mating connector	Phoenix Contact 1847068 (CBL-10-01096)[1]

[1]Power cable is part of the ACC-XSWITCH-PCIE kit

Table 8: Power connector description




Figure 8: Power connector pinout

Pin	Name	Description
1	Vin 12 to 24 V	Power 12 to 24 V
2	SHLD	Shielding
3	GND	Power supply Ground

Table 9: Power connector pin assigment

4.3 GPIO

4.3.1 GPI / GPO connectors

Item	Value
Connector	CONN-9P-0530470910, Through-hole pin header, 9 positions, 1.25 mm pitch
Signals	GPI / GPO
Mating connector	P1.25 mm pitch wire-to-board receptacle housing with matching crimp terminals

Table 10: GPI / GPO connectors general description




Figure 9: GPI / GPO connectors pinout

GPI connector		GPO connector	
Pin	Name	Pin	Name
1	ISO_GPI 1	1	ISO_GPO 1
2	ISO_GPI 2	2	ISO_GPO 2
3	ISO_GPI 3	3	ISO_GPO 3
4	ISO_GPI 4	4	ISO_GPO 4
5	ISO_GND	5	ISO_GND
6	ISO_GPI 5	6	ISO_GPO 5
7	ISO_GPI 6	7	ISO_GPO 6
8	ISO_GPI 7	8	ISO_GPO 7
9	ISO_GPI 8	9	ISO_GPO 8

Table 11: GPI / GPO connectors pin assigment

4.3.2 External GPIO connector

Item	Value
Connector	CONN Header Block 5-POS, 3.5MM, Right Angle, 250V/8A, THT, 1843826
Signals	IO, GND
Mating connector	Phoenix Contact 1847084

Table 12: External GPIO connector general description




Figure 10: External GPIO connector pinout

Pin	Name	Description
1	ISO_GPO	Open collector output from the selected “master” camera
2	ISO_GPO_5V	Push-pull 5 V output from the selected “master” camera
3	ISO_GND	(common) Isolated Ground for the IO subsystem
4	ISO_GPI	External input trigger signal, 3.3 to 24 V input
5	ISO_5V0	Isolated 5 V power output for IO subsystem[1]

[1]Do not connect external power supply to this pin. Sourcing capability limited to 5 V 400 mA, including power needed for IO subsystem.

Table 13: IO connector pin assigment

5 IO-subsystem

The IO subsystem is designed to enable synchronized operation of connected XIMEA cameras. Synchronization can be achieved either through an external trigger signal or by using a master-slave configuration. An external trigger signal is connected to the input pin ISO_GPI. In the master-slave mode, one of the cameras connected to the switch is designated as the master, while the remaining cameras are synchronized using the output signal from the master camera.

5.1 Internal power supply

To enable synchronization of all connected cameras via either an external trigger or the master camera's output, the switches include an internal 5 V power supply (an isolated 2 W DC/DC converter) that powers the IO subsystem.

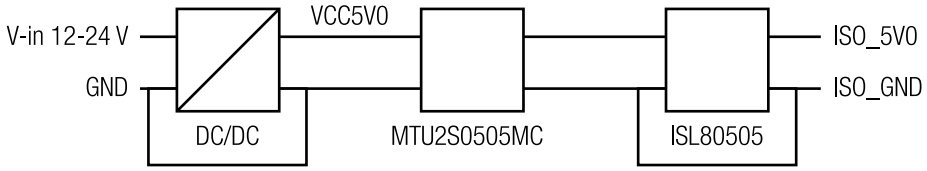


Figure 11: Power supply of IO-subsystem

5.2 Circuitry requirement

All components of the IO subsystem are powered by the two voltage levels: ISO_5V0 and ISO_GND.
ISO_5V0 is generated by the internal power supply.

5.3 Synchronization mode selection

Two synchronization modes are available:

- External trigger
- Master-slave mode

The selection between both modes is made via the dip-switch GPI-Select:

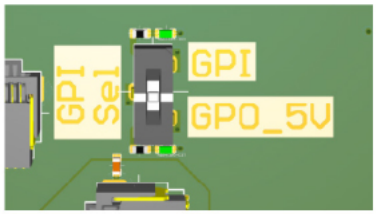


Figure 12: Synchronization mode selector

Position GPI-Sel	Synchronization mode
GPI	External trigger (pin ISO_GPI signal)
GPO_5V0	Master-Slave-Mode (pin ISO_GPO_5V signal)

Table 14: DIP switch mode description

5.4 IO configuration

The xSWITCH is designed to support different synchronization modes of the connected XIMEA cameras.

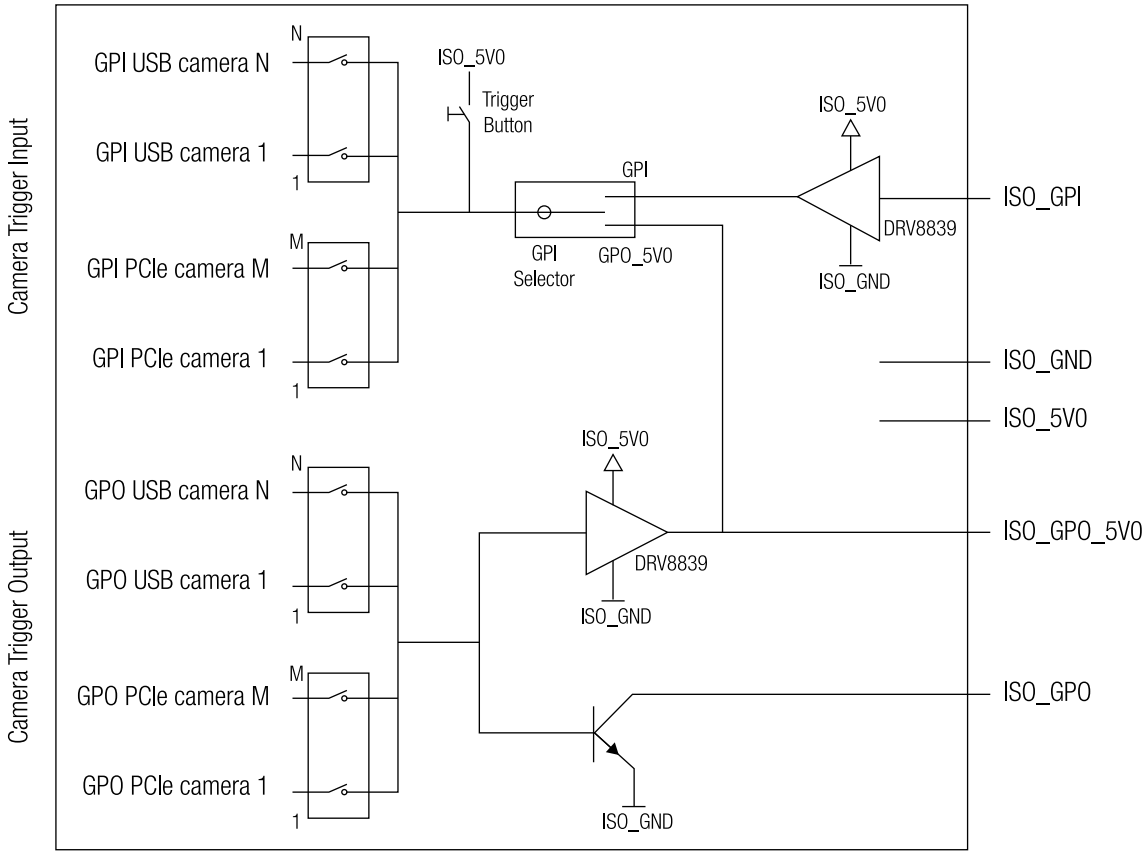


Figure 13: Functional diagram of the IO-system

The interconnected IO ports of the cameras are the optically isolated input and output lines.

5.4.1 Trigger input configuration

To synchronize the cameras, either the IO connector pin ISO_GPI (for external trigger mode) or the internal signal ISO_GPO_5V0 (for master-slave mode) is connected to the GPI pins of the cameras that require synchronization. The specific cameras to be synchronized are defined by configuring their individual DIP switches (GPI USB Camera n or GPI PCIe Camera n). These DIP switches connect the input signal to the corresponding camera's input line.

5.4.2 Trigger output configuration

One camera can be selected — and only one should be selected — to generate the output signal by configuring its specific DIP switch (GPO USB Camera n or GPO PCIe Camera n). This output signal can be used to:

- Trigger all cameras connected to the same switch
- Trigger external devices (e.g., another xSWITCH)

The selected output signal will be connected to the internal and external signal ISO_GPO / ISO_GPO_5V0.

5.5 Signal level

5.5.1 ISO_GPI signal level

The signal level of the GPI is described in the following table:

V-in-min [V]	V-in-max [V]	State
0	<0.4	Off (0)
0.4	2.5	Transient
>2.5	24	On (1)

Table 15: Digital trigger input ISO_GPI, signal levels

Note: The Input level **V-in** represents the amplitude of the input signal. Voltage levels referenced to common ground ISO_GND

5.5.2 ISO_GPO signal level

The digital output ISO_GPO type is Open Collector NPN, the maximum usable open circuit voltage level is 24 V.

5.5.3 ISO_GPO_5V0 signal level

The signal level of the ISO_GPO_5V0 is described in the following table:

Logic status	V-out [V]
Off (0)	0.0
On (1)	5.0

Table 16: Digital output ISO_GPO_5V0, signal levels

Note: The Output level **V-out** represents the amplitude of the input signal. The voltage levels refer to ISO_GND

6 Usages

6.1 Buttons

Two buttons are soldered onto the switch. The trigger button is located on the left side of the switch, while the second button, the PCIe reset button, is located on the bottom-right side.

6.1.1 Trigger button

This button can be used to generate a trigger pulse on the GPI-Selector output position to test the GPI configuration.
A rising edge trigger pulse (0V -> 5V) will be generated.




Figure 14: Trigger button

6.1.2 PCIe reset button

Pressing this button will result in reset of the xSWITCH PCIe bus and all connected cameras.




Figure 15: PCIe reset button

Note: This PCIe reset button is for debugging purposes only.

7 Additional information

7.1 Cables

7.1.1 CBL-MTP-X8G3-FF-10M0

To connect product with MTP connector to MTP host connector you can use a 10-meter MTP fiber-optic trunk cable supporting PCIe Gen3 x8 with a data rate of 64 Gbit/s. Cable has (pinless) female-to-female connectors and contains 24 Corning ClearCurve glass fibers. The cable features a minimum bend radius of 7.5 mm and a plenum (OFNP)-rated outer jacket.

It is also available in 5 m, 10 m, 20 m, 30 m, 40 m, and 50 m lengths.



Figure 16: CBL-MTP-X8G3-FF-10M0 cable

7.1.2 CBL-PCUO-X8G3-0M15

The product includes the CBL-PCUO-X8G3-0M15, a 15 cm MTP to Firefly 24-fiber cable supporting PCIe Gen3 x8.

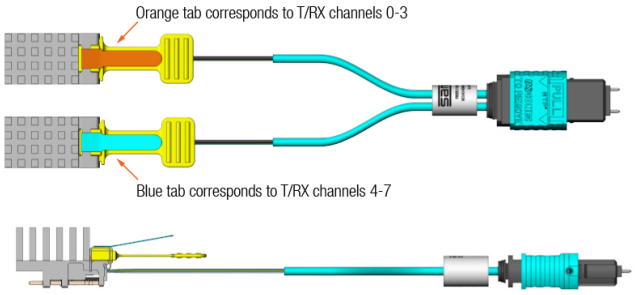


Figure 17: CBL-PCUO-X8G3-0M15 cable

7.1.3 CBL-ECUE-X4G3-1M0/2M0/3M0

The FireFly copper cables are bidirectional and flexible. PCIe Gen3 x4 lanes with performance to 28 Gbps, 12 differential pairs. Both sides are equipped with locking mechanism. The cable is available in 1 m ,2 m, and 3 m lengths. The EMI/EMC performance should be evaluated by customer.




Figure 18: CBL-ECUE-X4G3-1M0

7.2 Handling precautions

7.2.1 ESD precautions

Semiconductor components are particularly sensitive to electrostatic discharge (ESD). Therefore, take the following precautions:

1. Maintain relative humidity in the working environment between 40% and 70%. The use of an apparatus for ion generation may be needed to remove electricity.

2. Ensure that all conveyors, solder vessels, soldering irons, and peripheral equipment are electrically grounded.

3. Use rings or bracelets connected to ground through high resistance (on the level of 1 MΩ). Wearing ESD clothing and footwear, using conductive floor mats, and implementing other measures to minimize electrostatic discharge is recommended.

4. Avoid using Styrofoam or other highly static-prone materials for storing completed board assemblies.

7.2.2 Heat dissipation

All xSWITCH models are very compact, high-performance devices. Although the xSWITCH models are designed to be power efficient, the high component packing density can lead to elevated temperatures. In particular, the PCIe switch component located on the bottom side of the main PCB generates a significant amount of heat during operation. As a result, the entire unit may heat up.

Adequate heat dissipation must therefore be ensured, for example by providing sufficient thermal contact to a heat sink or by adding active or passive cooling, if required.

7.3 Scope of delivery

- The switch XS-8P-X2G2-FF-X8G3-MTP
- A Power cable (CBL-10-01096), one DC power input socket female (OD5.5/ID2.1, Center +) with 3-pin Power-mating-connector Phoenix Contact 1847068
- A 5-pin IO-mating-connector Phoenix Contact 1847084
- A screwdriver (MECH-SCRDRW-2.5MM-50MM)

8 Quickstart guide

8.1 Hardware setup

8.1.1 Essential components

It is important that the power is turned off when inserting/detaching the cables. General ESD precautions need to be applied. Failing this requirement may lead to product damage.

- XS-8P-X2G2-FF-X8G3-MTP multi camera platform
- Power cable: Cable with one DC power input socket female (OD5.5/ID2.1, Center +)
- Camera cable: Firefly ECUE copper cable (CBL-ECUE-X4G3-xM0)
- xiX XIMEA cameras with PCIe FireFly interface
- Host cable: optical MTP cable (CBL-MTP-X8G3-FF-xxxM0)
- Host PC

8.1.2 Connecting the components

Step 1. Ensure the power supply and the computer are turned off before connecting any cables. The order of cable connections is not strictly specified, but you can follow the steps 2, 3, and 4 in this order.

Step 2. Connect the cable CBL-ECUE-X4G3-xM0 to the FF port on XS-12P-X2G2-FF-X8G3-SFF and then on the xiX XIMEA cameras with PCIe FireFly interface.

Step 3. Connect the cable CBL-MTP-X8G3-FF-xxxM0 to XS-12P-X2G2-FF-X8G3-SFF and to the host computer.

Step 4. Connect the power cable to XS-12P-X2G2-FF-X8G3-SFF and to the power supply.

Step 5. Power on the power supply.

Step 6. Power on the computer.

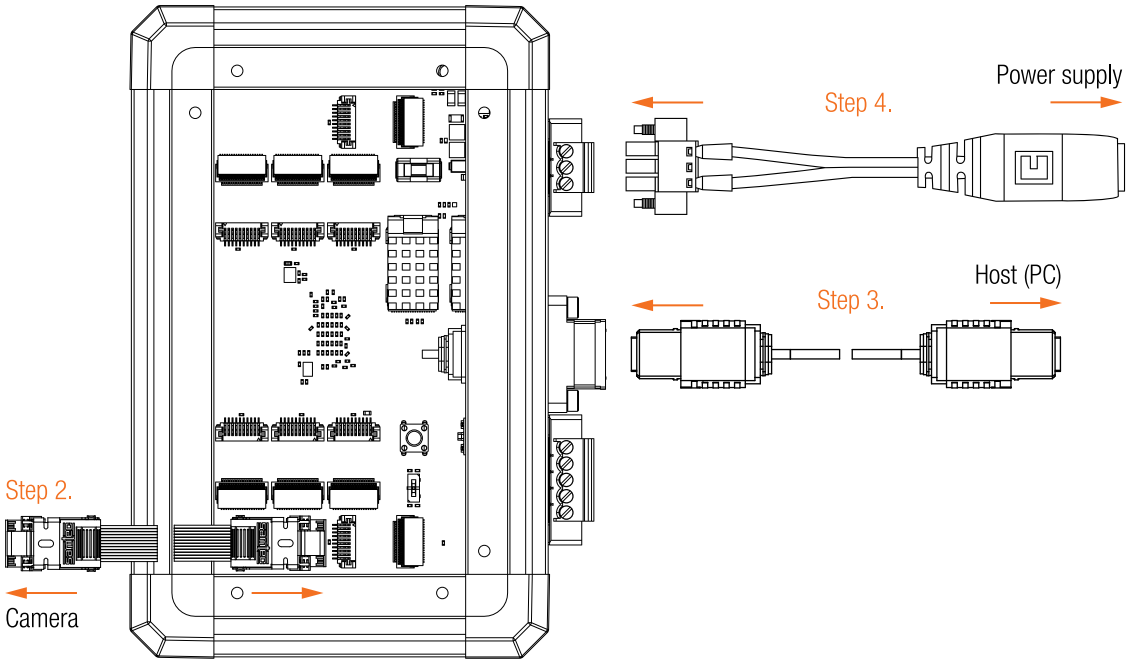


Figure 19: XS-8P-X2G2-FF-X8G3-MTP cable connection

For more information about XS-8P-X2G2-FF-X8G3-MTP please contact: sales@ximea.com.

List of Figures

1 xSWITCH XS-8P-X2G2-FF-X8G3-MTP 4
2 Dimensional drawing of XS-8P-X2G2-FF-X8G3-MTP 5
3 GPI / GPO DIP switches 6
4 Switch for selecting synchronization mode 6
5 Conectors location 7
6 Firefly connector pinout 8
7 MTP connector pinout 10
8 Power connector pinout 11
9 GPI / GPO connectors pinout 12
10 External GPIO connector pinout 13
11 Power supply of IO-subsystem 14
12 Synchronization mode selector 14
13 Functional diagram of the IO-system 15
14 Trigger button 17
15 PCIe reset button 17
16 CBL-MTP-X8G3-FF-10M0 cable 18
17 CBL-PCUO-X8G3-0M15 cable 18
18 CBL-ECUE-X4G3-1M0 18
19 XS-8P-X2G2-FF-X8G3-MTP cable connection 20

List of Tables

1 Parameters and mass 5
2 Location of connectors 7
3 FireFly connector description 8
4 FireFly connector UCC8 pin assignment 8
5 FireFly connector UEC5 pin assignment 9
6 MTP connector general description 10
7 MTP connector pin assignment 10
8 Power connector description 11
9 Power connector pin assigment 11
10 GPI / GPO connectors general description 12
11 GPI / GPO connectors pin assigment 12
12 External GPIO connector general description 13
13 IO connector pin assigment 13
14 DIP switch mode description 14
15 Digital trigger input ISO_GPI, signal levels 16
16 Digital output ISO_GPO_5V0, signal levels 16

XIMEA GmbH
Am Mittelhafen 16 • 48155 Münster • Germany • www.ximea.com
© Copyright, XIMEA GmbH, All rights reserved