

CURRERA-R Documentation



Part 2: Hardware guide.

This guide covers electrical, mechanical and environmental aspects of CURRERA-R.



This page is intentionally left blank.

Content:

Introduction	Page 5
CURRERA-R Intelligent Vision System overview	Page 5
Document Scope	Page 5
Audience	Page 5
Document updates and other important information	Page 5
CURRERA-R Online support and Online community	Page 5
CURRERA-R models and P/N's	Page 6
P/N Decoder	Page 6
Hardware and System Overview	Page 7
System Architecture	Page 7
Interfaces	Page 7
Power Supply options and requirements	Page 7
External Hardware features illustration	Page 8
Electrical Interfaces and Connections:	Page 9
System Port	Page 9
USB 2.0 High Speed Interface	Page 9
RS232 Serial Port	Page 9
Digital Inputs	Page 9
Digital Outputs	Page 9
Power Supply Input	Page 9
Gigabit Ethernet with PoE	Page 9
Display Output	Page 9
Isolation domains and Grounding precautions	Page 10
Grounding	Page 10
Connectors, pins assignment, mating connectors	Page 11
Cables and cabling requirements	Page 12
Shielding of Cables requirements	Page 12
Cables Wire gauges requirements	Page 12
LED Indicators	Page 12
Mechanical, Dimensions and mounting	Page 13
Dimensions	Page 13
Front Side Mounting	Page 13
Rear Side Mounting	Page 14
Heat Sink Notes	Page 14
Environmental and EMC	Page 15

Content (cont.):

Operating ambient temperature and conditions with heatsink	Page 15
Operating ambient temperature and conditions without heatsink	Page 15
Storage ambient temperature and conditions	Page 15
Operating humidity, Maximum Altitude	Page 15
Water and liquids	Page 15
Freezing water and liquids, Corrosive fluids, Salt water	Page 15
Vibrations and shock	Page 15
EMC Compliance, EMC immunity	Page 15
Ionising Radiation, Cosmic Ray	Page 15
EMC Compliance Declaration	Page 16
Serial numbers and Labels	Page 17
Specifications Tables	Page 18
Electrical, Mechanical and Environmental	Page 18
Interfaces and Connectors	Page 18
CURRERA-R Processor, Memory and Video Options	Page 18
CURRERA-R Sensors, available options	Page 18
Digital Inputs and Outputs Timing Table	Page 19

CURRERA-R Introduction

CURRERA-R Intelligent Vision System overview

CURRERA-R Intelligent Vision System is highly integrated, compact, cost and energy efficient solution for rapid deployment of Machine Vision and Imaging systems using field proven tools and operating systems.

Document Scope

This document covers CURRERA-R hardware related information required for successful planning and implementation of the CURRERA-R Intelligent Vision System. It contains specifications of electrical interfaces, connectors and their pinouts, mechanical drawings, specifications of operating environmental conditions and other information required for integration and use.

Audience

Engineers, managers and everyone involved in planning, development and deployment of Machine Vision and Imaging Systems based on CURRERA-R.

Document updates and other important information

Please visit our support web site at www.ximea.com/support to receive up to date technical information as well as most recent drivers and firmware.

CURRERA-R Online Support and Online Community


We are inviting you to visit the CURRERA online community section at www.ximea.com/community to ask for advice regarding any specific questions related to the CURRERA-R as well to contact our technical support and field application engineers any time at www.ximea.com/support.

CURRERA-R Models, P/N Decoder

Basic Models table:

CURRERA-R Model P/N:	Sensor Resolution:	Sensor:	Shutter:	BW/Color:	CPU:	RAM:	SSD Storage:
RS04xx	752×480	MT9V034C12STM	Global	B/W	Z510 1.1GHz	512MB	1GB
RL04xx	752×480	MT9V034C12STM	Global	B/W	Z530 1.6GHz	1024MB	4GB
RS04Cxx	752×480	MT9V034C12STC	Global	Color	Z510 1.1GHz	512MB	1GB
RL04Cxx	752×480	MT9V034C12STC	Global	Color	Z530 1.6GHz	1024MB	4GB
RS13xx	1280×1024	EV76C560ABT-EQV	Global	B/W	Z510 1.1GHz	512MB	1GB
RL13xx	1280×1024	EV76C560ABT-EQV	Global	B/W	Z530 1.6GHz	1024MB	4GB
RS13Cxx	1280×1024	EV76C560ACT-EQV	Global	Color	Z510 1.1GHz	512MB	1GB
RL13Cxx	1280×1024	EV76C560ACT-EQV	Global	Color	Z530 1.6GHz	1024MB	4GB
RS50xx	2592×1944	MT9P0311I2STM	Rolling	B/W	Z510 1.1GHz	512MB	1GB
RL50xx	2592×1944	MT9P0311I2STM	Rolling	B/W	Z530 1.6GHz	1024MB	4GB
RS50Cxx	2592×1944	MT9P0311I2STC	Rolling	Color	Z510 1.1GHz	512MB	1GB
RL50Cxx	2592×1944	MT9P0311I2STC	Rolling	Color	Z530 1.6GHz	1024MB	4GB

Model P/N Decoder:

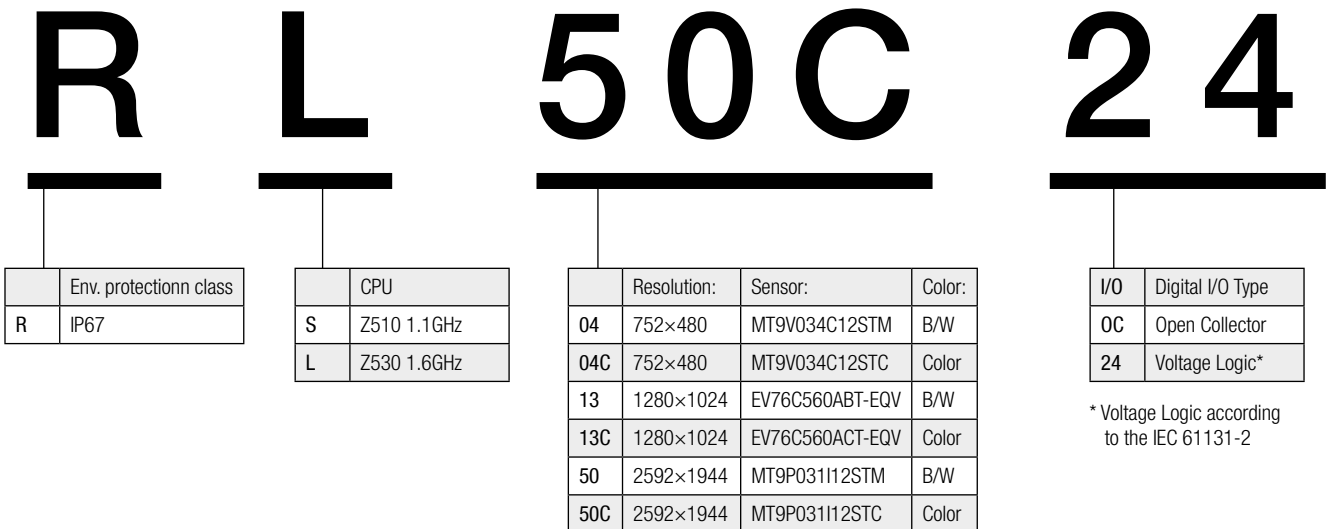

Hardware and system overview

System architecture & Internal hardware features

System Architecture

CURRERA-R (further referred to as the “device”) is essentially an ultra compact Personal Computer (PC) and Machine Vision Camera, integrated within compact and rugged IP67 class housing.

Its image sensor is connected to the PC via a 2.5Gbit/s high speed data bus. The entire transfer of image data to RAM transfer is highly optimized and requires no CPU resources. All the CPU capacity is available for the Vision or Imaging Software.

The PC is powered by a 45nm technology INTEL ATOM x86 CPU with 1.1GHz or 1.6GHz processor clock. It further has 533MHz DDR2 data RAM and Solid State Drive (SSD) with error correction and wear balancing. Independent system watch dog processor monitors system health and is capable of restarting the system in the case of a power supply brown out and/or software malfunction.

Interfaces

Similar to the standard PC, CURRERA-R is equipped with a complete set of hardware interfaces providing connectivity to standard PC peripherals including the Gigabit Ethernet, USB, RS-232 and Isolated Digital parallel I/O's for connection to Automation Interfaces and target hardware integration. One external Micro SD card slot is available for extended nonvolatile storage. XVGA analog interface is available for the connection to a standard PC monitor.


Power supply options and requirements

Versatile power supply options CURRERA-R either over Gigabit Ethernet, using Power Over Ethernet (PoE) standard in a Class 0 device, or through the System Port from external DC source, ranging from 12V to 48V DC. Actual power requirements range will be from 7W to 13.5W depending on the supply voltage and CPU usage.

Hardware and system overview

External hardware features

CURRERA-R shown with heatsink attached

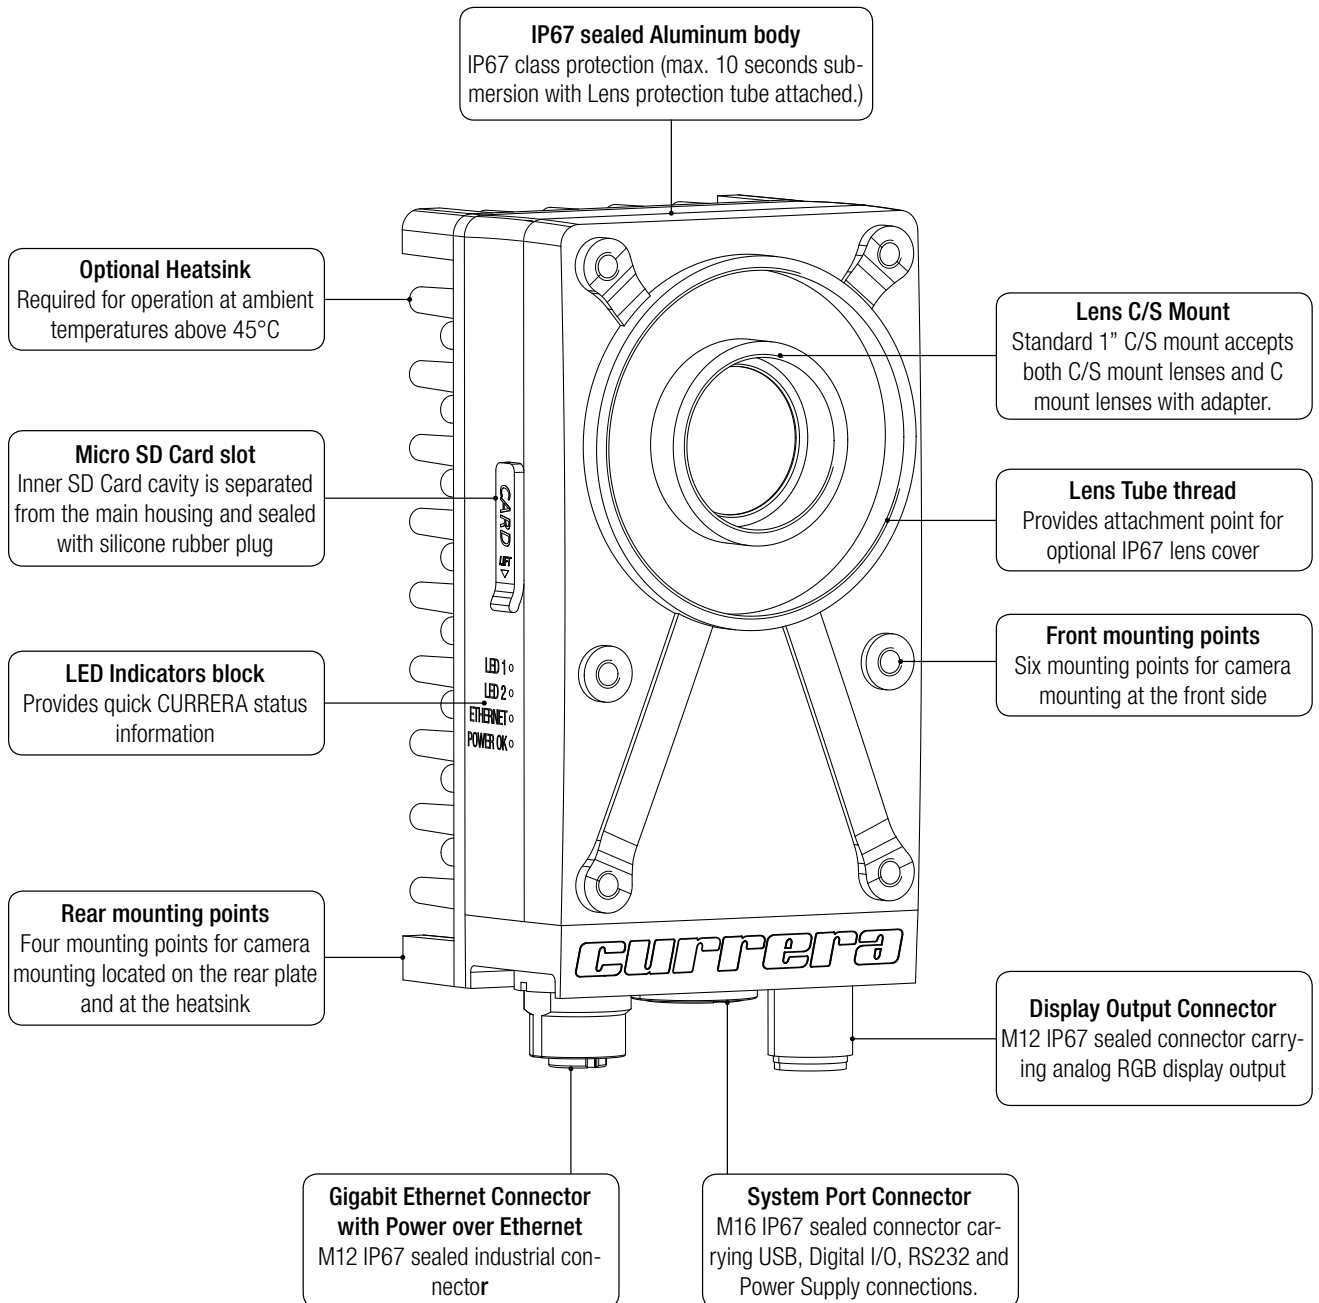

Electrical Interfaces & Connectors

Interfaces list, specifications and precautions

System Port - aggregates following interfaces:

USB 2.0 High speed interface:

Expansion for more than one USB device is possible using a standard powered USB hub or system breakout box. USB Interface and its ground is galvanically connected to the housing. Δ Maximum DC load of the USB VCC is 100mA peak. Cable must conform to USB standard both in terms of characteristic impedance and shielding.

RS-232 Serial Interface:

Standard RS-232 serial port for up to 1Mb/s transfer rate. Rx and Tx data only, no hardware handshake signals. RS-232 Interface and its ground is galvanically connected to the housing.

Digital Inputs:

Four user configurable, high speed, isolated outputs.

Logic state 0: $U < 5V$, $I < 0.5mA$; Logic state 1: $U > 11V$, $I > 5mA$

Note1: Δ Maximum current load per input is 12mA. Δ Maximum input voltage is 24V DC.

Note2: Valid for units without the I/O suffix: Four user configurable, high speed, isolated current mode inputs with one ground common line. Can be readily used with 5V high side switched sources. Δ For higher than 5V V_{in} sources the current shall be limited to 10mA by adding a serial resistor R_s according to the following equation: $R_s = (V_{in} - 1.5) / 0.01 - 360$

Digital Outputs:

Open collector option (OC I/O suffix): four user configurable, high speed, isolated open collector, low side switched outputs with one common ground line and isolated auxiliary 5V common source. Note: Δ Maximum current load per switch is 100mA. Δ Maximum open switch voltage is 24V DC. Δ No inductive loads are allowed. Δ Maximum current load for the 5V digital outputs common source is 60mA.

Voltage output option (24 I/O suffix): Four user configurable, high speed, isolated voltage, high side switched outputs with one common ground line and one common voltage supply, according to the IEC 61131-2. Notes: Δ Maximum current load for each digital output is 1A. Δ Maximum source voltage 48V. Δ Minimum source voltage 6V. Note: Valid for units marked without the I/O suffix: Four user configurable, high speed, isolated open collector, low side switched outputs with one common ground line and isolated auxiliary 5V common source. Δ Maximum current load per switch is 100mA. Δ Maximum open switch voltage is 24V DC. Δ No inductive loads are allowed. Δ Maximum current load for the 5V digital outputs common source is 60mA. See the **"Usage of Digital Inputs and Digital Outputs"** on CURRERA support pages for more information.

Power Supply Input:

Provides optional power supply feed where PoE is not available. 12-48V DC 7-13.5W, maximum allowed ripple 200mV. Δ Power Supply input is isolated towards the device electronics and the housing and has 200V isolation limitation towards Ethernet signals. Shall your Ethernet wiring require more than 200V isolation, you must use PoE or ensure that your power supply provides required isolation.

Gigabit Ethernet with PoE

1000BASE-T IEEE802.3af compliant Ethernet interface with Power Over Ethernet (PoE) Class 0.


Display output

Analog RGB display, 75 ohms, VESA compliant with resolution up to 1600x1200 pixels.

Electrical Interfaces & Connectors

Isolation domains & Grounding precautions

Following illustration shows the Galvanically Isolated domains and connectors pins assignment per domain.

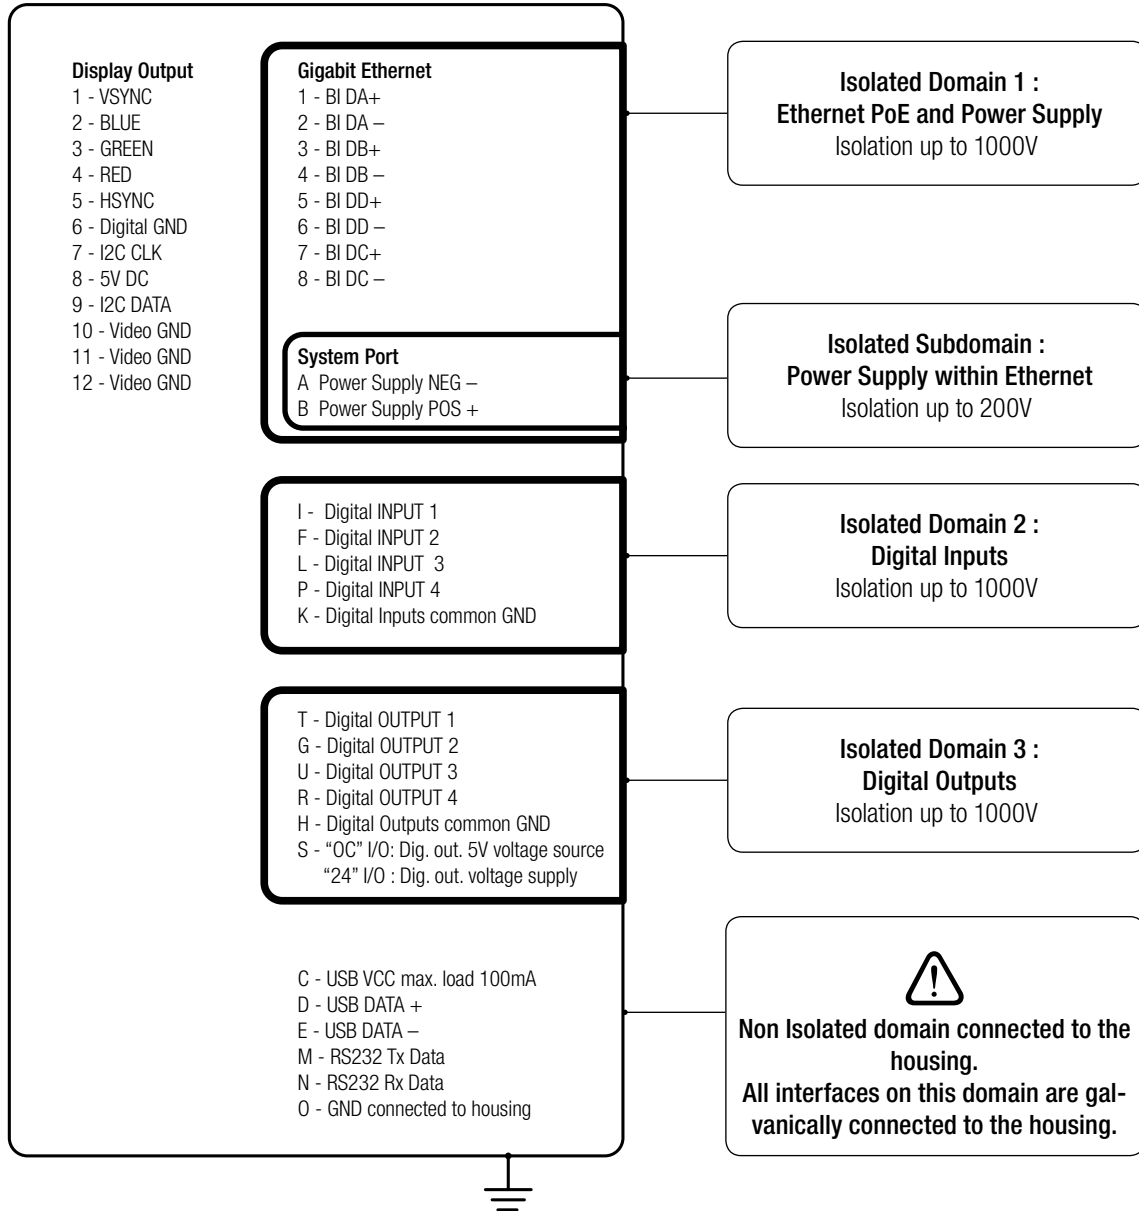


Grounding

⚠ Connections to the non-isolated domain interfaces shall be always kept at the same ground potential to avoid ground currents and possible issues or hardware damages.

Electrical Interfaces & Connectors

Connectors, pin assignments and mating connectors

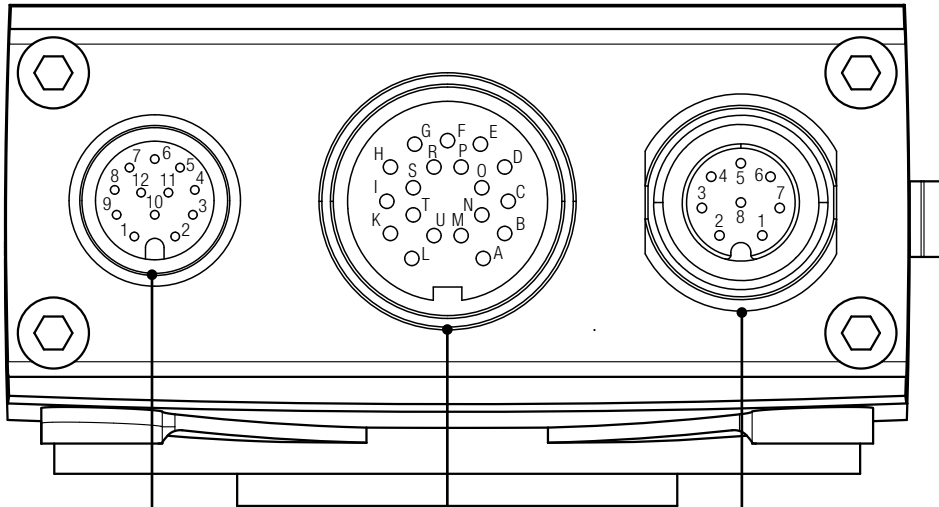

Display output

Pin Nr.	Function:	Comment:
1	VSYNC	
2	BLUE	
3	GREEN	
4	RED	
5	HSYNC	
6	Digital GND	
7	I2C CLK	
8	5V DC	max. load 50mA
9	I2C DATA	
10	Video GND	
11	Video GND	
12	Video GND	
	SHIELD	

M12 male socket, 12 pins
Binder P/N: 09-3491-969-12

Compatible mating connectors:
Binder P/N:
99-1492-822-12
99-1492-812-12
99-1492-992-12

System Port

Pin Nr.	Function:	Comment:
A	Power Supply NEG -	12V - 48V DC 13.5W
B	Power Supply POS +	12V - 48V DC 13.5W
C	USB 5V VCC +	100mA max. load
D	USB DATA +	
E	USB DATA -	
F	Digital INPUT 2	Isolated
G	Digital OUTPUT 2	Isolated
H	Digital outputs COMMON	Isolated
I	Digital INPUT 1	Isolated
K	Digital inputs COMMON	Isolated
L	Digital INPUT 3	Isolated
M	RS232 TX Data	
N	RS232 RX Data	
O	Ground - Chassis	
P	Digital INPUT 4	Isolated
R	Digital OUTPUT 4	Isolated
S	"OC" I/O option 5V output!	max. load 60mA
	"24" I/O option V supply	max. 48V input!
T	Digital OUTPUT 1	Isolated
U	Digital OUTPUT 3	Isolated
	SHIELD	

M16 female socket, 19 pins
Binder P/N: 09-0464-90-19

Compatible mating connectors:
Binder P/N:
99-5461-00-19 ; 99-5461-15-19
99-5461-75-19 ; 99-5661-00-19
99-5661-15-19 ; 99-5661-75-19
99-5461-40-19 ; 99-5861-15-19

Gigabit Ethernet with PoE

Pin Nr.	Function:	Cable wire Color:
1	BI DA+	WHITE-ORANGE
2	BI DA -	ORANGE
3	BI DB+	WHITE-GREEN
4	BI DB -	GREEN
5	BI DD+	WHITE-BROWN
6	BI DD -	BROWN
7	BI DC+	WHITE-BLUE
8	BI DC -	BLUE
	SHIELD	

M12 female socket, 8 pins
Binder P/N: 09-3482-275-08

Compatible mating connectors:
Binder P/N:
99-1487-812-08
99-1489-814-08
99-1487-914-08
99-1487-992-08
99-1487-822-08

Notes:

1. Not all combinations of connectors are possible. Please inquire technical support for details.

2. Please see the CURRERA-R system brochure or our online shop for a list of available cables and accessories.

Electrical Interfaces & Connectors

Cables and cabling requirements

Cabling Shielding

In general, all cables connected to the device requires a shielding jacket which must be connected to the interface connector to ensure EMC compliance. No plastic body connectors or unshielded cables are allowed. USB data lines and the monitor port signals require additional internal shield jackets due to signal integrity requirements. It is also recommended to have separate shield jackets on the RS-232 data lines and Digital I/O's to minimise crosstalk.

Cabling Wire gauges

Power supply wire gauges shall provide low enough resistance to supply the camera with at least 12V DC measured across the input terminals and 13.5W load. Ethernet PoE wiring

LED Indicators

LED 1 - Red - Software configurable indicator

LED 2 - Orange - Software configurable indicator

Ethernet - Blue - Ethernet Activity

Power OK - Green - Power Present, either via PoE or via Power Supply input


Please see the CURRERA-R Quick start guide to learn more about the LEDs configuration options.

Mechanical - dimensions and mounting

Front side mounting


Bottom View

Connectors positions

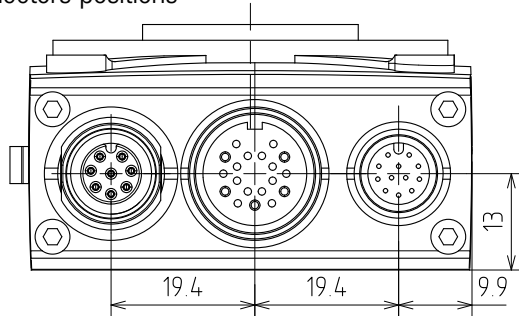


Front View

Mounting points positions

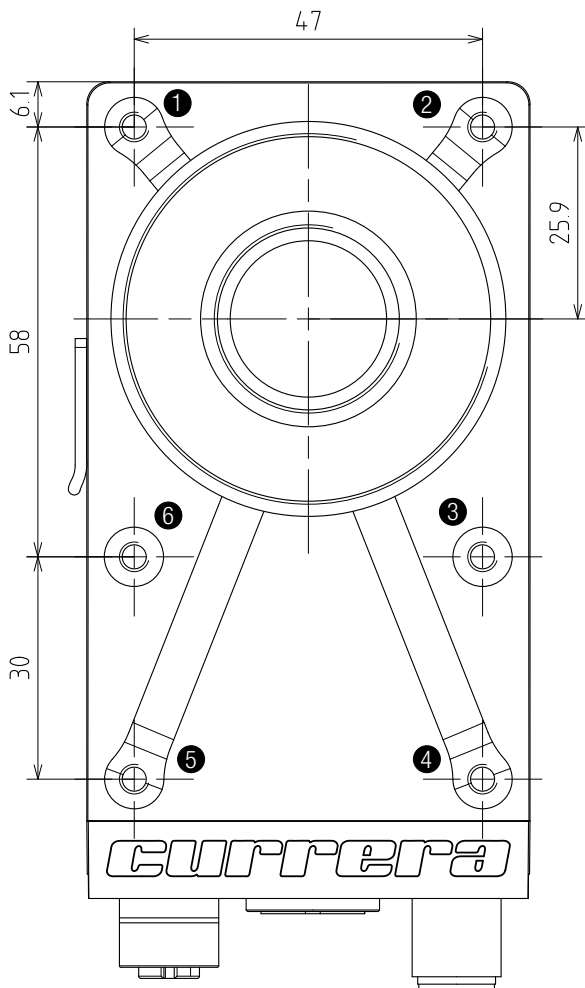


Side View

Dimensions with heatsink

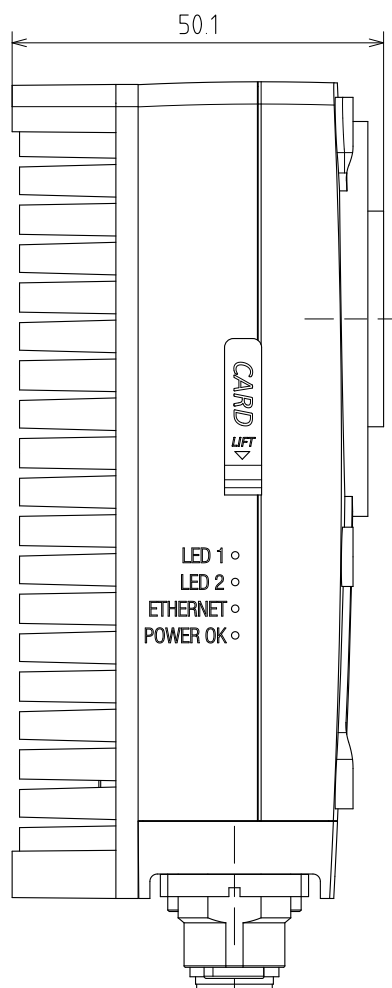

Side View

Dimensions without heatsink

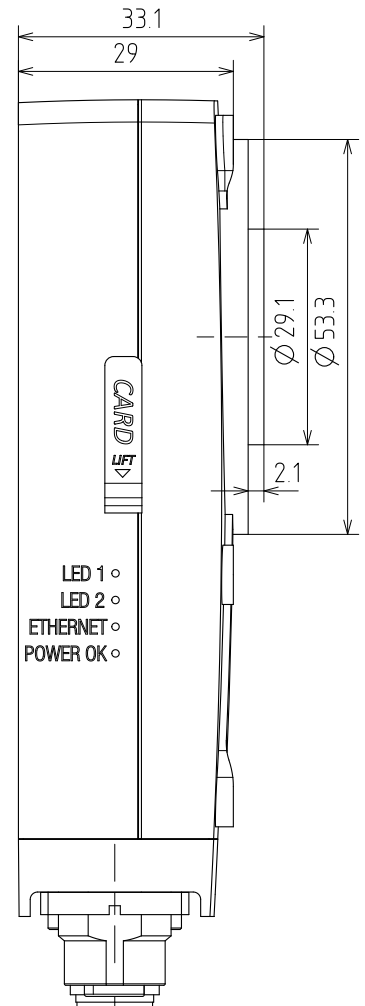


Six mounting threads M4 on the front side.
Maximum depth of the screw is limited to 5mm.
Max. screws torque is 1.3 N-m @ 5mm screw depth

Mechanical - dimensions and mounting

Rear side mounting, heatsink notes

Bottom View with heatsink attached

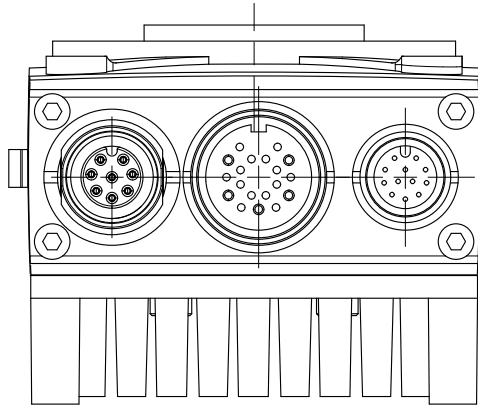

Heatsink use, installation and precautions.


Continuous operation above 45°C ambient temperature at full CPU load requires use of heatsink.

Heatsink kit comes with the heatsink itself, four M3x8 mounting screws and a temperature conductive gap filler already placed on the heatsink and protected by transparent plastic film against contamination and damage.

Installation requires removal of the protection film and simple attachment of the heatsink by four screws to the back panel of the device. ⚠ Max. screws torque is 0.5 N-m.

Bottom View with heatsink attached

Mounting points positions

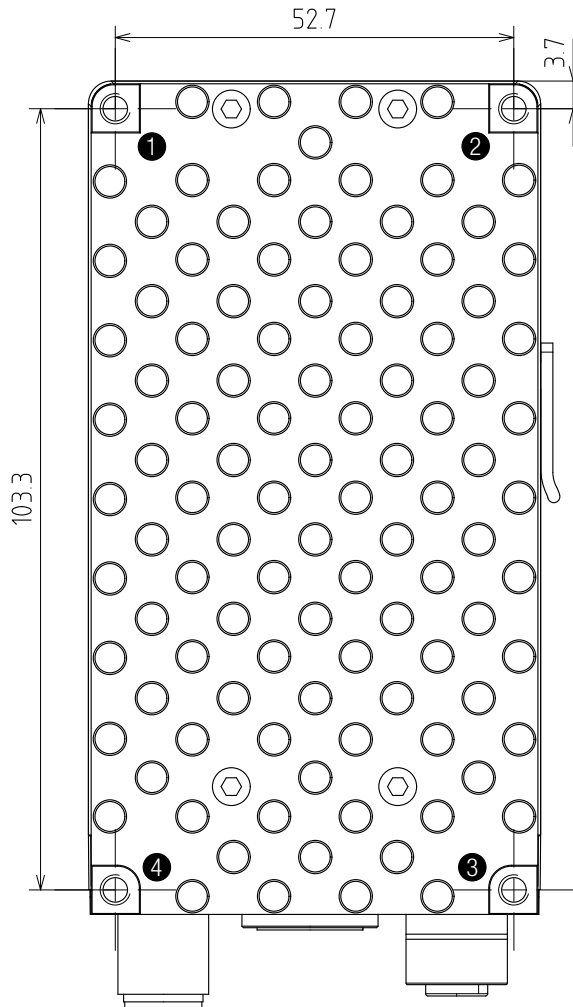


Four mounting points M4 on the heatsink.

⚠ Max. depth of the screws is 6mm.

⚠ Max. screws torque is 1.3 N-m @ 5.5mm screw depth

Rear View without heatsink

Dimensions & Mounting points positions

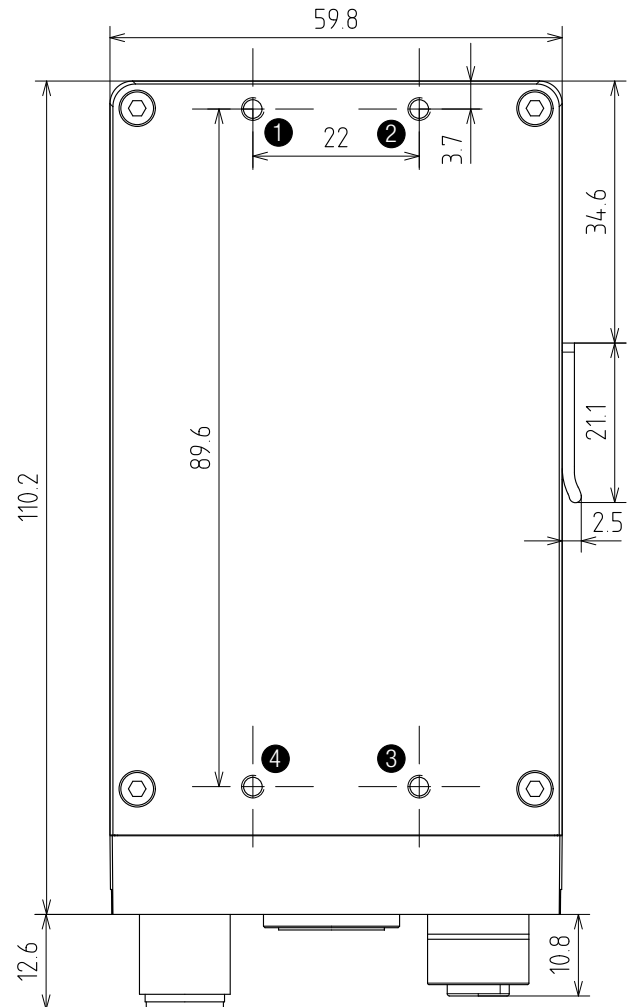

Four mounting points M3 on the rear panel.

⚠ Max. depth of the screws is 6mm.

⚠ Max. screws torque is 0.5 N-m @

Environmental

Operating conditions and requirements.

Operating ambient temperature and conditions without heatsink

0°C - 45°C, requires obstacle free air flow path around device body

Operating ambient temperature and conditions with heatsink

0°C - 65°C, requires obstacle free air flow path around device body and heatsink

Storage ambient temperature and conditions

15°C - 65°C, relative humidity 5% - 95% no condensing

Operating Humidity, Maximum Altitude

Without lens protection tube: relative humidity 5% - 95% no condensing, Max. altitude 2500m. With lens protection tube: not critical, otherwise preferred relative humidity 5% - 95% no condensing

Water and liquids

Without lens protection tube: IP60, no water in contact with the device body, no condensation allowed. With lens protection tube: IP67, limited to 5 minutes @ 1m water depth

⚠️Note: Ingestion of water or fluids into the camera body for any reason will void the warranty.

Freezing water and liquids, Corrosive fluids, Salt water

Precautions shall be taken to not allow water to freeze on the device body

No liquids other than water are allowed to get in contact with the device body when the lens protection tube (lens sheath) is attached. No corrosive fluids of any kind shall get in contact with the device body. No salt water shall get in contact with the device body

Vibrations and shock

Operating vibration random: 10Hz - 1000 Hz 5g_{rms}

Operating vibration sinusoidal: 10Hz - 1000 Hz 5g_{rms}

Operating shock: 50g, 3ms half sine, 18 shocks, 6 orientations

30g, 11ms half sine, 18 shocks, 6 orientations

EMC compliance, EMC immunity

CE, FCC part 15 Class A device compliant, radiated emissions within EN55011 Class A at 10m EMC Immunity Complies to EN61326:1997 +A2:2001 Table 1, except exposed Image sensor For EMC compliance you must operate this device with shielded cabling.

Ionising Radiation, Cosmic Rays

No operation or storage allowed in presence of man-made Ionising Radiation. Note: natural cosmic rays may cause bad pixels on the image sensor and as such are not covered under the warranty.

EMC Compliance declaration

CE and FCC Compliance

XIMEA GmbH
Hafenplatz 4
48155 Münster
Deutschland

VERIFICATION

Model:	CURRERA-R - RS04, RL04, RS13, RL13, RS50, RL50
Type of equipment:	Industrial Personal Computer, Industrial Camera
Applicable Directives:	89/336 IEEC Electromagnetic Compatibility Directive 72/23 IEEC Low Voltage Directive
Standards of conformity:	EN 55011 Group 1, Class A, EMC Limits for Electromagnetic Compatibility EN 50082-1 Electromagnetic Compatibility - Generic Im- munity Standard EN 61010-1 Part 1: General Safety Requirements
Other Tests:	FCC Part 15A Radiated Emissions Limits

XIMEA GmbH hereby declares that the device specified above conform to the Directives and Standards, when installed and operated in accordance with the specifications set forth by XIMEA GmbH. The original copy of this document is kept at XIMEA with copies of the relevant test data and certificates, which constitute the required technical file for self declaration.


.....
Signature

January 17th, 2011

Serial numbers and labels


Rear side Label placement

Contains model, serial number and HW version, barcoded serial number in Code 128 and Datamatrix. Connector pins assignments included for reference as well.

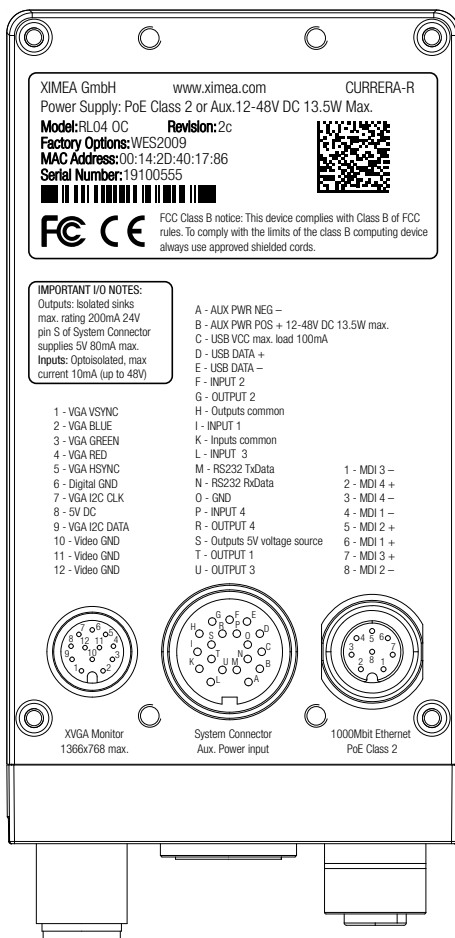

Left side Label placement

Contains model, serial number and HW version, barcoded serial number in Code 128 and Datamatrix.

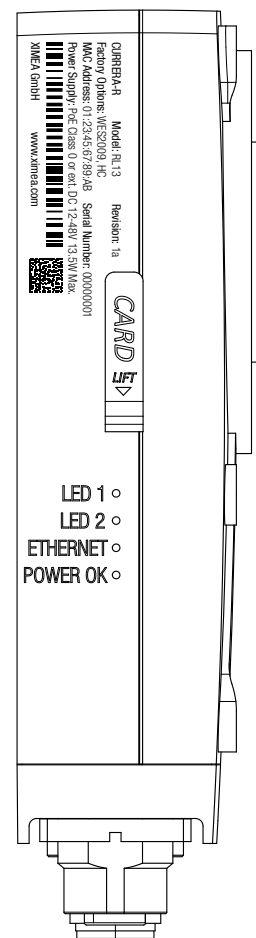

Hardware Specifications Table

Electrical, Mechanical and Environmental:

Power Requirements	Power over Ethernet IEEE802.3af, Class 0: typ. 7W max. 12W	Power via System Port: 12-48V DC typ. 7W, max. 13.5W
Housing Dimensions without heatsink	WxHxD 59.2 x 109.8 x 31 mm	Optional Lens Sheath: height 60 mm, internal diameter 50mm
Housing Dimensions with heatsink	WxHxD 59.2 x 109.8 x 48 mm	Weight: 262g
Environmental	Ingress Protection: IP67 with lens sheath tube attached	Operating temperature with heatsink -10°C to +65°C
		Operating temperature without heatsink -10°C to +40°C

Interfaces and Connectors:

Connector	Signals	Mating Connectors:
Ethernet	1000BASE-T IEEE802.3af Ethernet with PoE	M12 M 8pins, Binder, P/N: 09-3482-275-08
Monitor	XVGA max 1366 x 768 pixels resolution	M12 F 12pins, Binder, P/N: 99-1492-822-12
Multi I/O Connector	4x Isolated Inputs, 5-24V 12mA max input current, 100nS trigger delay, user configurable	M16 M 19pins, Binder, P/N: 99-5461-00-19
OC I/O option	4x Isolated Outputs, 5-24V 100mA max sink current, 100nS output delay, user configurable	
24 I/O option	4x Isolated Outputs, 6-48V 1A max high side switch, 20us - 100us output delay, user configurable	IEC
	RS232 Serial Port, non isolated, up to 1Mb/s	
	High Speed USB, non isolated, 5V, max 100mA device power supply capable	
	Auxiliary Power Supply 12-48V DC typ. 7W, max. 12W	
BOBME Modular Breakout Box preliminary information	6 USB ports, 4 isolated I/O with 24V and 5V common sources, Illuminator driver with 1000mA max. Constant Current source, RS232 port, Dimensions TBD	

Note 1: BOBME Modular Breakout box for Multi I/O with integrated USB hub and standard PC connectors available at Q1 2011.

Note 2: Contact sales for cable and connectors kits for your application.

CURRERA-R Processor, Memory and Video Options, available options: RSxx and RLxx

Processor and Chipset	DDR2 RAM	SSD	Internal Micro SDHC Card	External Micro SDHC Card Slot	Analog Video Output
RSxx Intel Atom Z530 1.6GHz US15W	1GB 533MHz	4GB	optional	standard	XVGA max 1600 x 1200
RLxx Intel Atom Z510 1.1GHz US15W	512MB 400MHz	1GB	optional	standard	XVGA max 1600 x 1200

CURRERA-R Sensors, available options: Rx04 WVGA, Rx13 1.3MPx, Rx50 5Mpx

Sensor	WVGA Aptina MT9V034C12STM -04 suffix	1.3MP e2v EV76C560BB -13 suffix	5MP Aptina MT9P031112STM -50 suffix			
Resolution	752 x 480 pixels	1280 x 1024 pixels	2592 x 1944 pixels			
Type	CMOS Global Shutter	CMOS Global Shutter	CMOS Rolling Shutter			
Active Area Size	1/3" 4.51 x 2.88 mm	1/1.8" 6.9 x 5.5 mm	1/2.5" 5.7 x 4.28 mm			
Sensor Pixel size	6 x 6 µm	5.3 x 5.3 µm	2.2 x 2.2 µm			
Dynamic range (typ.)	55dB linear ; 110dB HDR / linlog	62dB linear ; 100dB HDR / linlog	70dB linear			
Sensitivity	4.8V / lux-sec	6V / lux-sec (TBD)	1.4V / lux-sec			
Color Filter	N/A - Black and White	N/A - Black and White	N/A - Black and White			
Bit Depth	8,10,(12) bits	8,10 bits	8,10,12 bits			
Gain	0-12 dB	0-24 dB	0-42 dB			
Exposure time	10µs - 1s	5µs - 1s	33µs - 1s			
Basic Readout Modes	Resolution:	fps:	Resolution:	fps:	Resolution:	fps:
Full Resolution	752 x 480 px	60	1280 x 1024 px	60	2592 x 1944 px	15
Half Resolution	376 x 240 px	200	640 x 512 px	100	1296 x 972 px	45
Quarter Resolution	-	-	320 x 240 px	200	648 x 486 px	80
Linescan			1280 x 32 px	1600		

All cameras supports:

- arbitrary sized partial readout window with granularity 2x2 pixels
- image flipping H and V

Note 3: most of the sensors available in both Black and White and Color Bayer RGB versions, please contacts sales for availability.

Note 4: Other readout and ROI readout modes available.

Note 5: OEM and large integrators customized versions available. Note 6: Additional sensors being added continuously. Please visit our web site for latest news.

Hardware Specifications Tables (cont.)

Digital Inputs and Outputs Timing Tables:

Model	Digital Input to register change	Register change to Digital Output	Digital Input (Trigger) to Digital Output (Strobe)	Trigger (Digital Input) to start of exposure	Trigger (Digital Input) to Strobe (Digital Output)	Trigger (Digital Input) to start of exposure
RL04/RS04 -OC	< 0.1 μ s	< 0.1 μ s	11 μ s	11 μ s	308 nS	2 μ S
RL13/RS13 -OC, 8bit/	< 0.1 μ s	< 0.1 μ s	19 μ s	31 μ s	11 μ S	11 μ S
RL13/RS13 -OC, 10bit/	< 0.1 μ s	< 0.1 μ s	19 μ s	42 μ s	18.63 μ S	42 μ S
RL50/RS50 -OC	< 0.1 μ s	< 0.1 μ s	0.3 μ s	2 μ s	18.63 μ S	31 μ S

Model	Digital Input to register change	Register change to Digital Output HI-LOW / LOW-HI	Trigger (Digital Input) to Strobe (Digital Output) HI-LOW / LOW-HI	Trigger (Digital Input) to start of exposure
RL04/RS04 -24, 12V	< 0.1 μ s	109 μ s / 15 μ s	119 μ s / 26 μ s	11 μ s
RL04/RS04 -24, 24V	< 0.1 μ s	109 μ s / 18 μ s	119 μ s / 29 μ s	11 μ s
RL13/RS13 -24, 8 bit/	< 0.1 μ s	109 μ s / 15 μ s	127 μ s / 33 μ s	31 μ s
RL13/RS13 -24, 8 bit/	< 0.1 μ s	109 μ s / 18 μ s	127 μ s / 36 μ s	31 μ s
RL13/RS13 -24, 10	< 0.1 μ s	109 μ s / 15 μ s	127 μ s / 33 μ s	42 μ s
RL13/RS13 -24, 10	< 0.1 μ s	109 μ s / 18 μ s	127 μ s / 36 μ s	42 μ s
RL50/RS50 -24, 12V	< 0.1 μ s	109 μ s / 15 μ s	109 μ s / 15 μ s	2 μ s
RL50/RS50 -24, 24V	< 0.1 μ s	109 μ s / 18 μ s	109 μ s / 18 μ s	2 μ s

Please see the CURRERA-R Quick start guide to learn more about the available trigger modes and their selection.

Product, Brands and Service names mentioned herein are the trademarks of their respective owners.

Information provided herein is subject to change without notice.



XIMEA GmbH
Hafenplatz 4
48155 Münster
Germany
info@ximea.com
Tel: +49 (251) 590 686 0
Fax: +49 (251) 590 686 99

XIMEA s.r.o.
Lesna 52
900 33 Marianka
Slovakia
info@ximea.sk
Tel: +421 (2) 205 104 26
Fax: +421 (2) 205 104 27

XIMEA Corp.
2102 Beech Court
Golden, CO 80401
USA
info@ximea.com
Tel: +1 (303) 748-4346
Fax: +1 (303) 202-6350